24" DEEP SLIDING GLASS DOOR BACK BAR COOLER

Project Name: _____

Project Location: _____

Model #: _____ Quantity: _____

Available Warehouse: _____

EBB Series Model: EBB69G-SD

POWERED BY BLIZZARD R290 Natural Refrigerant
Fully Replaceable, All-In-One Refrigeration System
PATENTED Everest Refrigeration



Refrigeration System
· Side mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
· Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
· Full-length air duct system ensures optimal circulation of cold air.
· Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
· Large capacity, corrosion-resistant condenser and evaporator coils.
· Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
· High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
· Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Cabinet Construction
· Heavy duty stainless steel countertop with textured laminate, black vinyl exterior.
· Galvanized steel interior walls and high quality stainless steel floor.
· 1 3/4" thick high density polyurethane insulation.
· Built-in caster thread receptacles for all models.

Lighting
· Shielded LED bar lighting with on/off switch provides bright, high color illumination at lower heat output.

Doors
· Low emissivity double glass panes reflect UV rays for efficient cooling.
· Black PVC door frames.
· Self-closes by weight.
· Removable doors and stainless steel door tracks make cleaning an easy process.

Shelving
· Two epoxy coated, steel wire shelves per section.
· Height adjustable stainless steel clips.

Temperature Control
· Multi-function digital controller with easy to read LED display.
· Factory preset temperature, 35°F.
· Temperature setting range from 33°F to 54°F.
· Audible overheat protection alarm for compressor and condenser coil.

Options
· Additional shelving.
· 3" or 5" swivel casters with locks.
· 3.5" – 6" height-adjustable and interchangeable legs.

Operating temperature range is 33ºF ~ 54ºF

The Best Warranty in the Industry
5 YEAR Compressor
3 YEAR Parts & Labor

ISO 9001

Please visit our website for updated Energy Efficiency information

Ref/ Frz/Dual	Doors	Capacity			Shelves	Refrigerant	HP	Power V-Hz-Ph	Amps	Crated Weight	Exterior Dimensions		
		Cu. Ft.	12 oz. Cans	12 oz. Bottles							L	D	H*
REF	2	20	700	441	2	R-290	1/4+	115-60-1	3.5	340 lbs (154kg)	68" (1727mm)	24.5" (622mm)	37.25" (946mm)

(†)Based on evaporating temperature of 23ºF (-5ºC) & condensing temperature of 131ºF (55ºC). (⚑) Product capacity is calculated based on standard industry figures. (∗) Reference plan view for clarification on caster/unit height. If dimensions and capacity are critical, please contact Everest Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration. Specifications subject to change without notice.

24" DEEP SLIDING GLASS DOOR BACK BAR COOLER

www.EVERESTref.com

EBB Series Model: EBB69G-SD

DIMENSIONAL DATA

External Dimensions	L	68" (1727mm)
	D	24.5" (622mm)
	H*	37.25" (946mm)
Crated Weight		340 lbs. (154kg)
Doors/Drawers/Lids		2
Max Weight Support (LBS)		-

STORAGE DATA

Net Capacity Cu. Ft. ⚑	20
Shelves	2
Barrels	-
20 oz. Bottles	-
12 oz. Bottles	700
12 oz. Cans	700
8" Mugs	-
# of Pans (Top)	-
# of Pans (Drawer)	-
Dividers	-
Trays	-

ELECTRICAL DATA

Voltage	115-60-1
Full Load Amperage	3.5
Feed Wires with Ground	3
Cord Length	9ft
NEMA Plug Type	NEMA 5-15P

REFRIGERATION DATA


Compressor Mounting	Side
Refrigerant	R-290
Compressor HP	1/4+
BTU/HR †	1926

KEY


R	Refrigerator	**D**	Door
REF	Refrigerator	**L**	Lid
F	Freezer	**H**	Half Door
FRZ	Freezer	**FD**	Full Door
DUAL	REF/FRZ Combo	**SD**	Solid Door
DR	Drawer	**GD**	Glass Door

	Elevation	Right	Plan	3D	Back
KCL					


PLAN VIEW

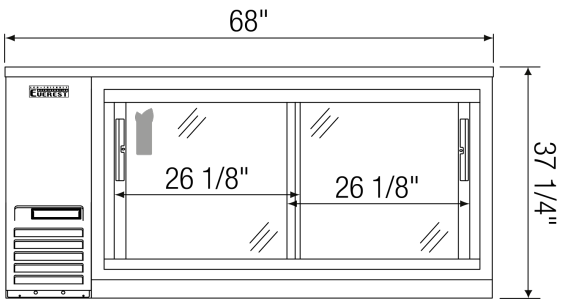


FRONT

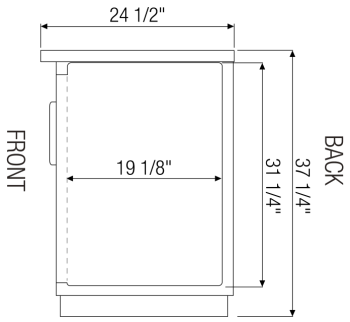

SIDE

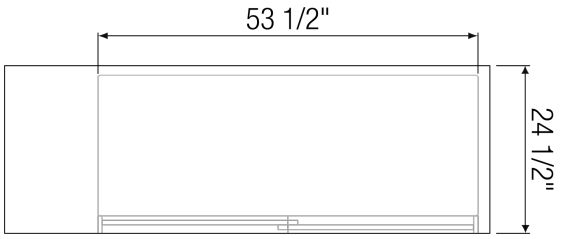

TOP

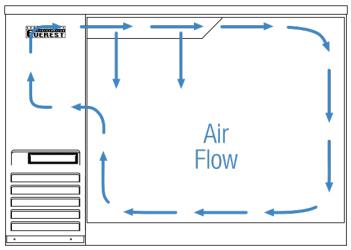

AIRFLOW

ACCESSORIES & OPTIONS

Part Number	Description
Additional Shelving	Contact Everest Refrigeration for more information.
AJL03-00	Interchangeable Leg for Caster
CASA3-01	3" Overall Height Caster Assembly - (2) Front (2) Rear
CASA5-01	5" Overall Height Caster Assembly - (2) Front (2) Rear

(†)Based on evaporating temperature of 23ºF (-5ºC) & condensing temperature of 131ºF (55ºC). (⚑) Product capacity is calculated based on standard industry figures. (∗) Reference plan view for clarification on caster/unit height. If dimensions and capacity are critical, please contact Everest Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration. Specifications subject to change without notice.