GLASS & SOLID COMBINATION HALF-DOOR UPRIGHT REACH-IN REFRIGERATOR

Top Mount Condensing Unit

www.EVERESTref.com

Project Name: _____

Project Location: _____

Model #: _____ Quantity: _____

Available Warehouse: _____

ES Series Model: EGSWH4

POWERED BY BLIZZARD R290 Natural Refrigerant

Fully Replaceable, All-In-One Refrigeration System

PATENTED Everest Refrigeration



Operating temperature range is 33ºF ~ 54ºF

The Best Warranty in the Industry

5 YEAR Compressor
3 YEAR Parts & Labor

ISO 9001

Please visit our website for updated Energy Efficiency information

Refrigeration System

· Top mounted, self-contained and fully detachable condensing unit uses environmentally friendly R404A* refrigerant with zero (0) Ozone Depletion Potential (ODP) and EPA compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). R290 condensing units are replaceable and require no on-site brazing. *Ask about alternative refrigerant.
· PSC evaporator fan motors for R404A models. Electronically commutated (ECM) fan motors for R290 models.
· Airflow guard ensures optimal circulation of cold air. R290 models include full-length air duct system.
· Time-initiated and temperature-terminated auto defrost heater for R404A and R290 freezers. Air defrost for R290 refrigerators.
· Large capacity, corrosion-resistant condenser and evaporator coils.
· Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
· High performance condenser fan motors ensure efficient compressor ventilation. R290 models use auto-reverse condenser fan motors which also support condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
· Pressure relief devices allow smooth access to cabinet interior when reopening doors.
· Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Cabinet Construction

· Heavy duty stainless steel interior / exterior with rounded corners for a hazard-free workspace.
· Galvanized steel top, bottom and rear.
· 2.5" thick high density polyurethane insulation.
· Four 5" swivel casters with locks on front set.

Lighting

· Shielded LED bar lighting with on/off switch provides bright, high color illumination at lower heat output.

Doors

· Low emissivity double glass panes and matte finish aluminum door frames for glass doors.
· Heavy duty stainless steel interior / exterior with 2.5" thick high density polyurethane insulation for solid doors.
· Frame heaters prevent exterior moisture build up.
· Self-closing with adjustable torsion system for a positive seal.
· Snap-in magnetic door gaskets make cleaning and replacement an easy process.
· Heavy duty, die-cast door handles for glass doors. High strength, recessed door handles for solid doors.
· Pre-installed door locks keep your items safe from theft.

Shelving

· Four epoxy coated, steel wire shelves per section.
· Height adjustable stainless steel clips.

Temperature Control

· Multi-function digital controller with easy to read LED display.
· Factory preset temperature, 35°F for refrigerators and -4°F for freezers. Temperature setting range from 33°F to 54°F for refrigerators and -10°F to 54°F for freezers.
· R290 models include audible overheat protection alarm for compressor and condenser coil.

Options

· Additional shelving.
· 3" swivel casters with locks.
· 3.5" – 6" height-adjustable and interchangeable legs.

Ref/ Frz/Dual	Doors	Capacity Cu. Ft.	Shelves	Refrigerant	HP	Power V-Hz-Ph	Amps	Crated Weight	Exterior Dimensions		
									L	D	H*
REF	4(H)	55	8	R-290	1/2	115-60-1	5.5	486 lbs (220kg)	59" (1499mm)	31.625" (803mm)	74.25" (1886mm)

(†)Based on evaporating temperature of 23ºF (-5ºC) & condensing temperature of 131ºF (55ºC). (⚑) Product capacity is calculated based on standard industry figures. (⁎) Reference plan view for clarification on caster/unit height. If dimensions and capacity are critical, please contact Everest Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration. Specifications subject to change without notice.

GLASS & SOLID COMBINATION HALF-DOOR UPRIGHT REACH-IN REFRIGERATOR

Top Mount Condensing Unit

www.EVERESTref.com

ES Series Model: EGSWH4

DIMENSIONAL DATA

External Dimensions	L	59" (1499mm)
	D	31.625" (803mm)
	H*	74.25" (1886mm)
Crated Weight		486 lbs. (220kg)
Doors/Drawers/Lids		4(H)
Max Weight Support (LBS)		-

STORAGE DATA

Net Capacity Cu. Ft. ⚑	55
Shelves	8
Barrels	-
20 oz. Bottles	-
12 oz. Bottles	-
12 oz. Cans	-
8" Mugs	-
# of Pans (Top)	-
# of Pans (Drawer)	-
Dividers	-
Trays	-

ELECTRICAL DATA

Voltage	115-60-1
Full Load Amperage	5.5
Feed Wires with Ground	3
Cord Length	9ft
NEMA Plug Type	NEMA 5-15P

REFRIGERATION DATA


Compressor Mounting	Top
Refrigerant	R-290
Compressor HP	1/2
BTU/HR †	1670

KEY


R	Refrigerator	**D**	Door
REF	Refrigerator	**L**	Lid
F	Freezer	**H**	Half Door
FRZ	Freezer	**FD**	Full Door
DUAL	REF/FRZ Combo	**SD**	Solid Door
DR	Drawer	**GD**	Glass Door

Elevation	Right	Plan	3D	Back


PLAN VIEW

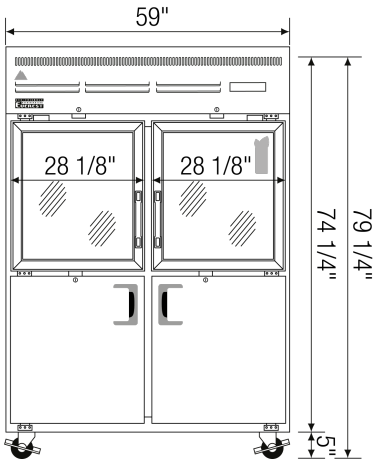

FRONT

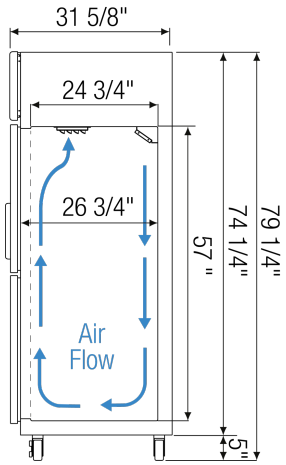

SIDE

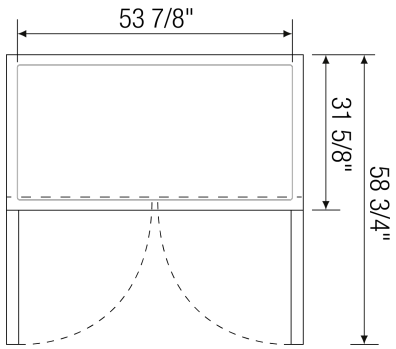

TOP

ACCESSORIES & OPTIONS

Part Number	Description
Additional Shelving	Contact Everest Refrigeration for more information.
AJL03-00	Interchangeable Leg for Caster
CASA3-01	3" Overall Height Caster Assembly - (2) Front (2) Rear

(†)Based on evaporating temperature of 23ºF (-5ºC) & condensing temperature of 131ºF (55ºC). (⚑) Product capacity is calculated based on standard industry figures. (⁎) Reference plan view for clarification on caster/unit height. If dimensions and capacity are critical, please contact Everest Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration. Specifications subject to change without notice.