BACK MOUNT SANDWICH PREP. TABLE

Back Mounted Condensing Unit

www.EVERESTref.com

Project Name: _____

Project Location: _____

Model #: _____ Quantity: _____

Available Warehouse: _____

EPB Series Model: EPBNR1

POWERED BY BLIZZARD R290 Natural Refrigerant

Fully Replaceable, All-In-One Refrigeration System

PATENTED Everest Refrigeration



Operating temperature range is 33ºF ~ 54ºF

The Best Warranty in the Industry

5 YEAR Compressor
3 YEAR Parts & Labor

ISO 9001

Please visit our website for updated Energy Efficiency information

Refrigeration System

· Back mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
· Front air breathing for flexibility in installation.
· Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
· Full-length air duct system ensures optimal circulation of cold air.
· Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
· Large capacity, corrosion-resistant condenser and evaporator coils.
· Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
· High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
· Pressure relief devices allow smooth access to cabinet interior when re-opening doors.
· Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Cabinet Construction

· Heavy duty stainless steel interior / exterior with rounded corners for a hazard-free workspace.
· 16 gauge, high quality stainless steel worktop, lid and hood.
· Galvanized steel bottom and rear.
· 2.5" thick high density polyurethane insulation.
· Four 5" swivel casters with locks on front set.

Doors

· Heavy duty stainless steel interior / exterior.
· 2.5" thick high density polyurethane insulation.
· Frame heaters prevent exterior moisture build up.
· Self-closing with adjustable torsion system for a positive seal.
· Snap-in magnetic door gasket make cleaning and replacement an easy process.
· High strength, recessed door handles.

Preparation Area

· NSF certified polycarbonate 6" deep pans (see table for size and quantity).
· 1/2" thick, foam insulated lid keeps top pan area cold and prevents moisture build-up.
· 12 1/4" deep cutting board is removable for ease of cleaning.

Shelving

· One epoxy coated, steel wire shelf per section.
· Height adjustable stainless steel clips.

Temperature Control

· Multi-function digital controller with easy to read LED display.
· Factory preset temperature, 35°F. Temperature setting range from 33°F to 54°F.
· Audible overheat protection alarm for compressor and condenser coil.

Options

· NSF certified stainless steel double overshelf.
· Additional shelving.
· 3" swivel casters with locks.
· 3.5" – 6" height-adjustable and interchangeable legs.
· Left hinged door.

Ref/ Frz/Dual	Doors	Capacity Cu. Ft.	# of Pans	Shelves	Refrigerant	HP	Power V-Hz-Ph	Amps	Crated Weight	Exterior Dimensions		
										L	D	H*
REF	1	8	-	1	R-290	1/5	115-60-1	2.5	226 lbs (102kg)	27.75" (705mm)	31.5" (800mm)	38.5" (978mm)

(†)Based on evaporating temperature of 23ºF (-5ºC) & condensing temperature of 131ºF (55ºC). (⚑) Product capacity is calculated based on standard industry figures. (⁎) Reference plan view for clarification on caster/unit height. If dimensions and capacity are critical, please contact Everest Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration. Specifications subject to change without notice.

BACK MOUNT SANDWICH PREP. TABLE

Back Mounted Condensing Unit

www.EVERESTref.com

EPB Series Model: EPBNR1

DIMENSIONAL DATA

External Dimensions	L	27.75" (705mm)
	D	31.5" (800mm)
	H*	38.5" (978mm)
Crated Weight		226 lbs. (102kg)
Doors/Drawers/Lids		1
Max Weight Support (LBS)		-

STORAGE DATA

Net Capacity Cu. Ft. ⚑	8
Shelves	1
Barrels	-
20 oz. Bottles	-
12 oz. Bottles	-
12 oz. Cans	-
8" Mugs	-
# of Pans (Top)	-
# of Pans (Drawer)	-
Dividers	-
Trays	-

ELECTRICAL DATA

Voltage	115-60-1
Full Load Amperage	2.5
Feed Wires with Ground	3
Cord Length	9ft
NEMA Plug Type	NEMA 5-15P

REFRIGERATION DATA


Compressor Mounting	Back
Refrigerant	R-290
Compressor HP	1/5
BTU/HR †	1655

KEY


R	Refrigerator	**D**	Door
REF	Refrigerator	**L**	Lid
F	Freezer	**H**	Half Door
FRZ	Freezer	**FD**	Full Door
DUAL	REF/FRZ Combo	**SD**	Solid Door
DR	Drawer	**GD**	Glass Door

	Elevation	Right	Plan	3D	Back
KCL					


PLAN VIEW

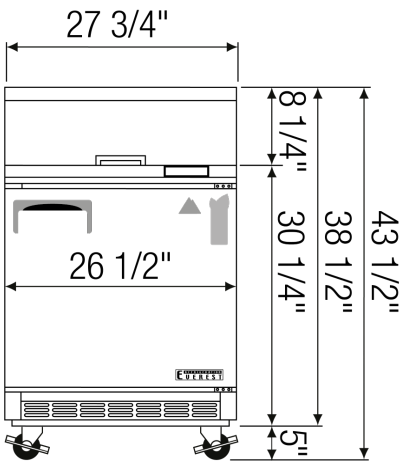

FRONT

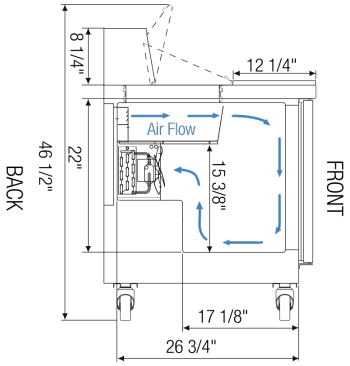

SIDE



TOP

ACCESSORIES & OPTIONS

Part Number	Description
Additional Shelving	Contact Everest Refrigeration for more information.
AJL03-00	Interchangeable Leg for Caster
CASA3-01	3" Overall Height Caster Assembly - (2) Front (2) Rear
Left Hinged Door	Contact Everest Refrigeration for more information.
OS06-00	Custom Double Overshelf 14" Depth x 28" Length

(†)Based on evaporating temperature of 23ºF (-5ºC) & condensing temperature of 131ºF (55ºC). (⚑) Product capacity is calculated based on standard industry figures. (*) Reference plan view for clarification on caster/unit height. If dimensions and capacity are critical, please contact Everest Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration. Specifications subject to change without notice.

201 W. Artesia Blvd., Compton, CA 90220 T. (310) 323-6586 F. (310) 323-7524