24" DEEP SIDE MOUNT UNDERCOUNTER REFRIGERATOR
SIDE MOUNTED CONDENSING UNIT

www.EVERESTref.com

Project Name: _____

Project Location: _____

Model #: _____ Quantity: _____

Available Warehouse: _____

ET Series Model: ETR2-24

3 YEARS PARTS & LABOR
5 YEARS ELECTRICAL
10 YEARS COMPRESSOR
WARRANTY



Refrigeration System
· Side mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
· Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
· Full-length air duct system ensures optimal circulation of cold air.
· Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
· Large capacity, corrosion-resistant condenser and evaporator coils.
· Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
· High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning. Refer to owner's manual for full maintenance instructions.
· Pressure relief devices allow smooth access to cabinet interior when reopening doors.
· Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Cabinet Construction
· Heavy duty stainless steel interior / exterior with rounded corners for a hazard-free workspace.
· Open spaced interior with no walls between compartments.
· 16 gauge, high quality stainless steel worktop.
· Galvanized steel bottom and rear.
· 2.5" thick high density polyurethane insulation.
· Four 5" swivel casters with locks on front set.

Lighting
· Energy efficient silicone coated and shatter-proof LED lighting provides bright, high color illumination with low heat output.

Doors
· Heavy duty stainless steel interior / exterior.
· 2.5" thick high density polyurethane insulation.
· Frame heaters prevent exterior moisture build up.
· Self-closing with adjustable torsion system for a positive seal.
· Snap-in magnetic door gasket make cleaning and replacement an easy process.
· High strength, recessed door handles.
· Pre-installed door locks keep your items safe from theft.

Shelving
· Two epoxy coated, steel wire shelves per section.
· Height adjustable stainless steel clips.

Temperature Control
· Multi-function digital controller with easy to read LED display.
· Factory preset temperature, 35°F. Temperature setting range from 33°F to 54°F.
· Audible overheat protection alarm for compressor and condenser coil.

Options
· 4" high stainless steel backsplash for worktop application.
· Additional shelving.
· 3" swivel casters with locks.
· 3.5" – 6" height-adjustable and interchangeable legs.
· NSF Certified Stainless Steel Double Overshelf.

ISO 9001

Please visit our website for updated Energy Efficiency information

Ref/ Frz/Dual	Doors	Capacity Cu. Ft.	Shelves	Refrigerant	HP	Power V-Hz-Ph	Amps	Crated Weight	Exterior Dimensions		
									L	D	H*
REF	2	9	4	R-290	1/4+	115-60-1	3.5	223 lbs (101kg)	47.5" (1207mm)	23.625" (600mm)	29.25" (743mm)

(†)Based on evaporating temperature of 23ºF (-5ºC) & condensing temperature of 131ºF (55ºC). (⚑) Product capacity is calculated based on standard industry figures. (⚹) Reference plan view for clarification on caster/unit height. If dimensions and capacity are critical, please contact Everest Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration. Specifications subject to change without notice.

24" DEEP SIDE MOUNT UNDERCOUNTER REFRIGERATOR
SIDE MOUNTED CONDENSING UNIT

ET Series **Model: ETR2-24**

DIMENSIONAL DATA

External Dimensions	**L**	47.5" (1207mm)
	D	23.625" (600mm)
	H*	29.25" (743mm)
Crated Weight		223 lbs. (101kg)
Doors/Drawers/Lids		2
Max Weight Support (LBS)		-

STORAGE DATA

Net Capacity Cu. Ft. ⚑	9
Shelves	4
Barrels	-
20 oz. Bottles	-
12 oz. Bottles	-
12 oz. Cans	-
8" Mugs	-
# of Pans (Top)	-
# of Pans (Drawer)	-
Dividers	-
Trays	-

ELECTRICAL DATA

Voltage	115-60-1
Full Load Amperage	3.5A
Feed Wires with Ground	3
Cord Length	9ft
NEMA Plug Type	NEMA 5-15P

REFRIGERATION DATA


Compressor Mounting	Side
Refrigerant	R-290
Compressor HP	1/4+
BTU/HR †	1557

KEY


D	Door	**R**	Refrigerator
L	Lid	**REF**	Refrigerator
H	Half Door	**F**	Freezer
FD	Full Door	**FRZ**	Freezer
SD	Solid Door	**DUAL**	REF/FRZ Combo
GD	Glass Door	**DR**	Drawer

Elevation	Right	Plan	3D	Back


PLAN VIEW

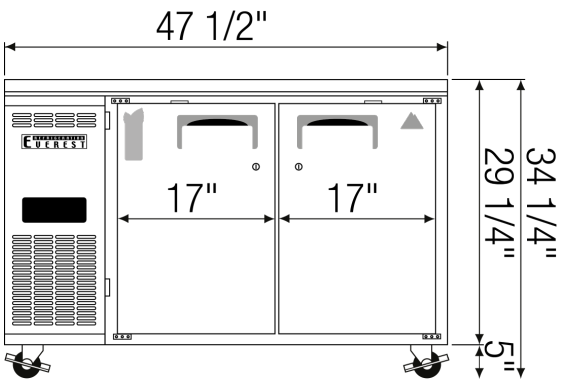

FRONT

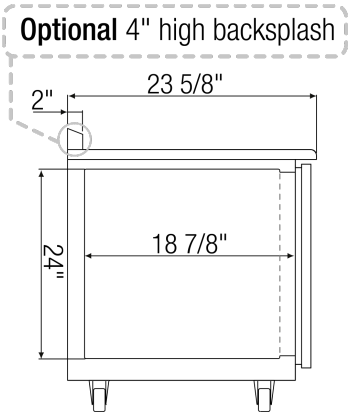

SIDE

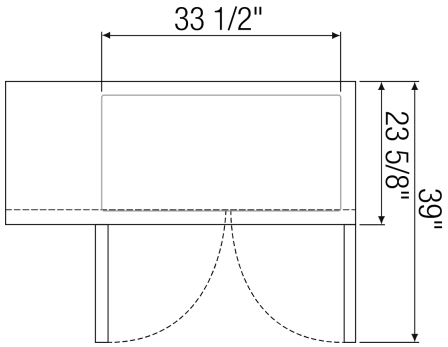

TOP

ACCESSORIES & OPTIONS

Part Number	Description
Additional Shelving	Contact Everest Refrigeration for more information.
AJL03-00	Interchangeable Leg for Caster (Optional)
BKSPL02-00	4" High (47-1/2" Long) Stainless Steel Backsplash
CASA3-01	3" Overall Height Caster Assembly - (2) Front (2) Rear
OS26-00	45" Double overshelf for side mount undercounters/prep. tables EPR2, EPR2

(†)Based on evaporating temperature of 23ºF (-5ºC) & condensing temperature of 131ºF (55ºC). (⚑) Product capacity is calculated based on standard industry figures. (⁎) Reference plan view for clarification on caster/unit height. If dimensions and capacity are critical, please contact Everest Refrigeration. Blizzard R290 replacement is at the sole discretion of Everest Refrigeration. Specifications subject to change without notice.