U.S.A FOODSERVICE DIVISION

TRUE MANUFACTURING CO., INC.
2001 East Terra Lane • O'Fallon, Missouri 63366-4434 • (636)240-2400
Fax (636)272-2408 • Toll Free (800)325-6152 • Intl Fax# (001)636-272-7546
Parts Dept. (800)424-TRUE • Parts Dept. Fax# (636)272-9471 • www.truemfg.com

Model:

TBR92-RISZ1-L-S-SSSS-1

Project Name	Location	
Item #	Qty	AIA #
Model #		SIS #

True Bar Refrigerator:

Reach-In Single Zone Refrigerator



FEATURES

- R290 Hydrocarbon refrigerant
- Temperatures of 33°F to 38°F (.5°C to 3.3°C)
- Exterior: Stainless steel
- Interior: Stainless steel
- RCU Technology
- White LED interior lighting
- NSF/ANSI standard 7 compliant for open food product
- UL Rated for outdoor use
- Three (3) interior access ports
- Field reversible doors
- Zero clearance (side and back)
- Front air intake / front air discharge
- Electronic temperature control with exterior digital display

ROUGH-IN DATA

Specifications subject to change without notice.
Chart dimensions rounded up to the nearest ⅛" (millimeters rounded up to next whole number).

Model	Doors	Shelves	Capacity		Cabinet Dimensions (inches) (mm)			115V/60/1 Voltage			Cord Length‡ (total ft.) (total m)	Crated Weight (lbs.) (kg)
			12 oz. Cans	12 oz. Bottles	W	D†	H	HP	Amps	NEMA		
TBR92-RISZ1-L-S-SSSS-1	4	12	182 6-pks	108 6-pks	92 2337	24⅞ 631	34¾ 881	¼	3.2	5-15P	10 3.04	TBD TBD

† Depth does not include 1½" (35 mm) for door handles. * Height does not include ¼" (7 mm) for leg levelers
‡ Cord length listed represents usable cord length.

MADE WITH INNOVATION IN THE USA · 5 YEAR COMPRESSOR WARRANTY USA · c UL us · CLASSIFIED UL EPH · natural refrigerant

1/20 - MS

APPROVALS:

AVAILABLE AT:

Model:

TBR92-RISZ1-L-S-SSSS-1

True Bar Refrigerator:

Reach-In Single Zone Refrigerator

ADDITIONAL FEATURES

REFRIGERATION SYSTEM

- Factory engineered, self-contained, capillary tube system
- Environmentally friendly R290 hydrocarbon refrigerant
- Forced air refrigeration system which maintains 33°F to 38°F (.5°C to 3.3°C) product temperatures
- Exclusive RCU technology allows for the reversing of the condensor fan motor, helping to keep the condensing coil clean and reduce the negative effects of a dirty coil

CABINET CONSTRUCTION

- Exterior: Stainless steel front, sides, and countertop
- Interior: Stainless steel floor and sides with ABS plastic ceiling
- Insulation: Entire cabinet is foamed-in-place using a high density, polyurethane insulation that has zero ozone depletion and zero global warming potential
- Base fitted with leg levelers

DOORS

- Door locks standard
- Field Reversible Doors standard (reverse hinge kit included)

SHELVING

- Twelve (12) adjustable, gray PVC coated wire shelves. Six (6) shelves are 17 11/16"W x 18"D (450 mm x 458 mm) and six (6) shelves are 20"W x 18"D (508 mm x 458 mm). Four (4) chrome plated shelf clips included per shelf.
- Aluminum shelf support pilasters. Shelves are adjustable on ½" (13 mm) increments.

MODEL FEATURES

- NSF/ANSI Standard 7 compliant for open food
- UL approved for outdoor use
- Electronic temp control with exterior digital display
- Three (3) access ports standard (see drawing for locations)

ELECTRICAL

- Unit completely pre-wired at factory and ready for final connection to a 115/60/1 phase, 15 amp dedicated outlet. Cord and plug set included.




115/60/1
NEMA-5-15R


OPTIONAL FEATURES/ACCESSORIES Upcharge and lead times may apply.

- ❑ TruLumina® 14-Color LED lighting
- ❑ Castors: ⅞" (23 mm) rollers, 2" (51mm), 3" (77mm), 4" (102mm), 5" (127mm) castors
- ❑ 6" (153mm) legs
- ❑ 6" (153mm) seismic legs
- ❑ Alternative temperature zones available (contact factory)
- ❑ Right side compressor


PLAN VIEW

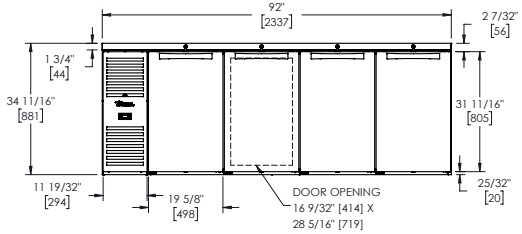


FRONT VIEW

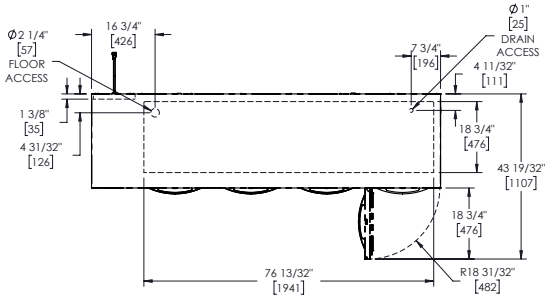

TOP VIEW

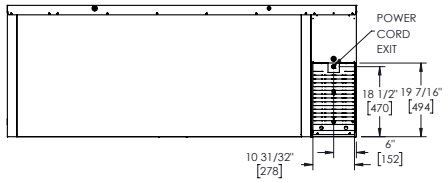

BACK VIEW



SIDE VIEW

PLAN VIEW NOTES

- Dimensions in brackets are in millimeters.
- Depth does not include 1 ½" (35 mm) for door handles.
- Height does not include ¼" (7 mm) for leg levelers

WARRANTY

Three year warranty on all parts and labor and an additional 2 year warranty on compressor. (U.S.A. only)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

METRIC DIMENSIONS ROUNDED UP TO THE NEAREST WHOLE MILLIMETER

TRUE MANUFACTURING CO., INC.

2001 East Terra Lane • O'Fallon, Missouri 63366-4434 • (636)240-2400 • Fax (636)272-2408 • Toll Free (800)325-6152 • Intl. Fax# (001)636-272-7546 • www.truemfg.com