Bluenix by BLUENIX

MODEL BLPT60-D4-HC
SANDWICH PREP TABLES



Stainless steel cabinet construction
Stainless steel interior and exterior (galvanized steel back & bottom).

Temperature range between 33°F ~ 39°F
Air guard on rear wall ensures proper air circulation and cooling.

Hydrocarbon refrigerants (R-290)
Increases energy HFC refrigerants. It is safer for the environment and does not cause ozone depletion.

5 YEAR WARRANTY PARTS & LABOR

7 YEAR WARRANTY COMPRESSORS

Cabinet Dimensions (inches/mm)		
L	D	H
60 1/2″ 1537 mm	33″ 839 mm	42 19/32″ 1082 mm

Weight (lbs/kg)	
Net Weight	Ship Weight
315 lbs 143 kg	379 lbs 172 kg

Cabinet construction

- Cyclopentane Insulation – Contains no hydro-fluorocarbons (HFCs) and is environmentally friendly.
- Epoxy coated wire shelves with adjustable shelving height.
- Drop-in section : Fans force cold air into this enclosed area keeping stred food items consistently cold
- Insulated pan cover with a stainless steel divider which prevents food spillage into the storage area beneath
- Standard 1/6 / 4″ food pans are provided. Unit accommodates 6″ deep pans
- Side rail cutting board bracket with 9 ½″ deep, 1/2″ thick cutting board included
- Four 4″ Diameter swivel casters with front brakes standard.


Refrigeration

- Self-contained system, rear mounted compressor.
- Electrodeposition coated evaporator increases performance by maintaining the heat transfer rates over the life of the evaporator and reducing potential corrosion.
- Innovative hot gas frame heating system reduces condensation and increases energy.


Intertek Intertek
Conforms to NSF/ANSI 7(ETL)

Natural Refrigerant


Front view

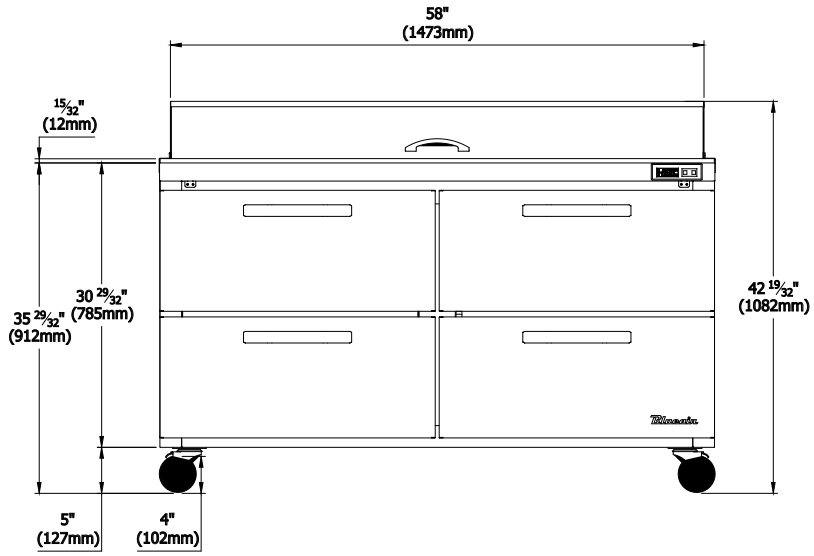

Side view

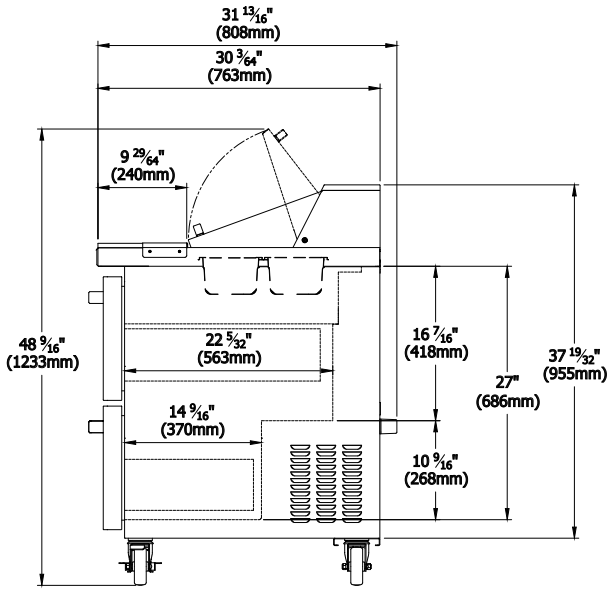

Top view

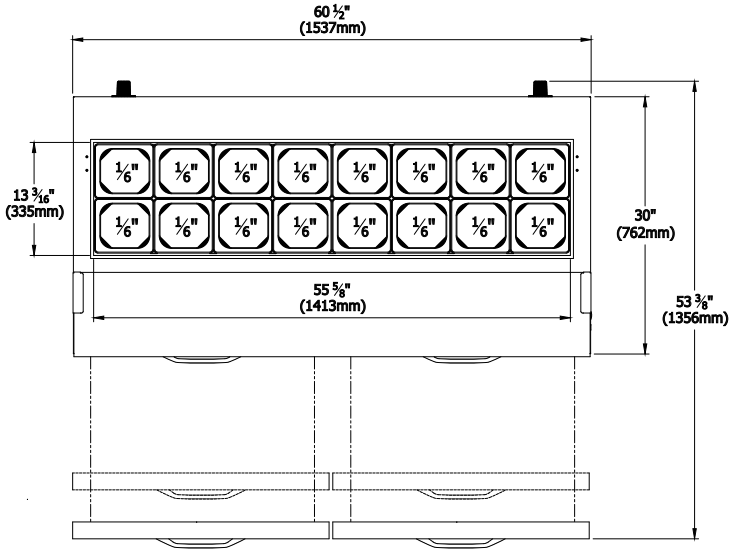

Doors

- Self-closing doors
- Durable door gasket with easy replacement.
- Lifetime guaranteed heavy duty all metal door handles. (Ni-Cr Plated)
- Door designed to open easily.

Design & Features

- Self-diagnostic digital temperature control & monitor system.
- Digital display allows for easy monitoring.
- Digital controls include automatic evaporator fan motor delay
- Rounded corner design gives a stylish appearance and reduces chances of injury.
- Visual and audible door open alarm, alarm sounds when doors are not completely closed to protect against food spoilage

Optional Features & Accessories

- 2.5" diameter casters available.
- Additional shelves are available.
- Drawer models available
- 6" pans available

Drawers	4
Capacity Cu.Ft.	16.7
Shelves	N/A
Refrigerant	R-290
Temperature Range	33°F ~ 39°F
Easy Maintenance	Sliding Condensing Unit
Connection	9.8 ft long (3m) flexible three wire cord with modeled plug
HP	1/4
Voltage	115V/60Hz
Amps	5.0
NEMA Config.	NEMA 5-15

Blue Air has right to change specifications without further notice.

- This product may exprose you to chemicals including Diisononyl Phthalate(DINP), which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.
- Ce produit peut vous exposer á des agents chimiques incluant le Diisononyl Phthalate(DINP), reconnu par l'Esat de Californie comme causant le cancer, Pour de plus amples renseignements, consulter le site www.P65Warnings.ca.gov.

blueairfse.com

orders@blueairfse.com

1-886-677-8500

223 W. Rosecrans Ave., CA 90248
T: 310-808-0102

9 W. Shelton Terrace #A, Hillside, NJ 07205
T: 908-688-0970