Bluecair
FOOD SERVICE EQUIPMENT LLC

PROJECT:	
MODEL # :	
ITEM # :	QTY :
AVAILABLE W/H :	APPROVAL :

Glass Door Merchandiser Freezer



BKGF23-HC



BKGF49-HC



BKGF72

STANDARD FEATURES

Cabinet construction
- Black or white painted steel exterior and white painted steel interior.
- High density foamed in place polyurethane insulation – Environmentally safe.
- Sturdy, epoxy coated wire shelves with adjustable shelving height.
- 4 shelves for each compartment
- 2.5" Diameter swivel casters with front brakes. Four casters on one- and two-door models and six on three-door models (two casters on each model have front brakes)

Refrigeration
- Hydrocarbon refrigerants (R-290) – increases energy efficiency by up to 25% compared to using HFC refrigerants. It is safer for the environment and does not cause ozone depletion.
- Front sliding refrigeration unit allows the unit to be serviced without being moved.
- Self-contained system, bottom mounted compressor provides quick and easy maintenance
- Epoxy coated evaporator reduces potential corrosion.
- Freezer has a temperature range between -10 and 0°F

Doors
- Self closing doors (doors close at 90° or less)
- Automatic hold open door feature at 110°
- Durable door gasket with easy replacement.
- Heavy duty recess door handles
- Door designed to open easily. Doors built with pressure relievers to eliminate vacuum pressure and allow easy door opening.
- Standard door locks
- Triple pane glass

Design & Features
- Digital temperature control & monitor system Keep food products safe by maintaining constant temperatures.
- Digital display allows for easy monitoring.
- Programs interpret the condition of refrigeration systems by self-diagnosis.
- Controls include automatic evaporator fan motor delays.

Lighting
- LED backlit graphic panel
- Interior Vertical LED lighting

Standard
- NSF/ANSI Standard 7 compliant

Connection
- 9 ft long flexible three wire cord with molded plug

Optional Features & Accessories
- Additional shelves are available


Intertek Intertek
Conforms to NSF/ANSI 7(ETL)

WARRANTY	APPROVALS:	AVAILABLE AT:
2 Years Parts and Labor 5 Years on Compressor in USA		


Glass Door Merchandiser Freezer

PRODUCT PLAN VIEW


- Top View -

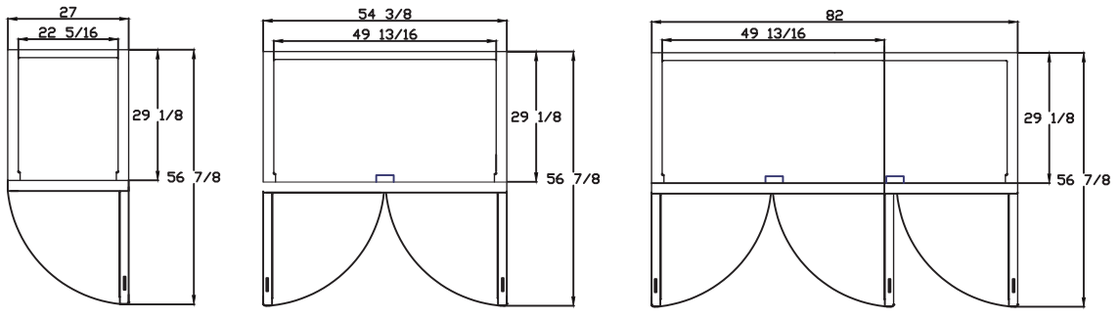

- Front View -

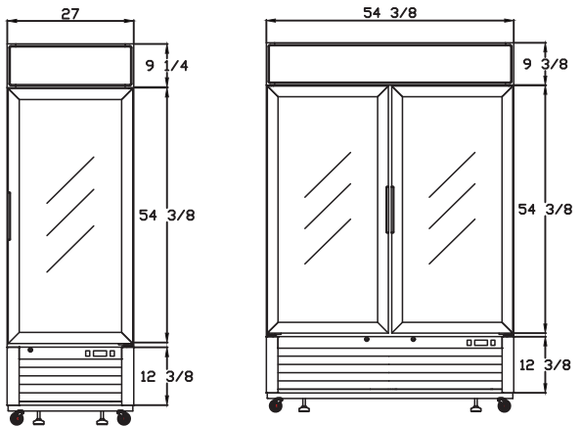

- Side View -

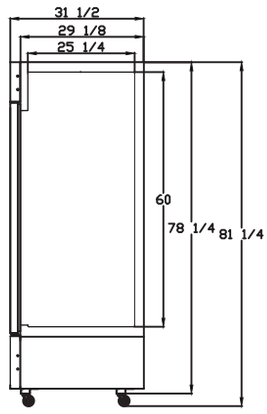

BKGF23-HC **BKGF49-HC** **BKGF72**

PRODUCT SPECIFICATION

Model	Product Description						Refrigerant				Temperature Range	
	Glass Door Merchandiser Freezer						R-290 (BKGF72: R-404a)				-10 and 5°F	
	Easy Maintenance						NEMA Config.				Cord Length (ft/m)	
	Sliding Condensing Uint						NEMA 5-15 (BKGF72: NEMA L14-20)				9.8ft(3m)	
	Doors	Capacity (Cu. Ft.)	Shelves	Cabinet Dimensions (inches / mm)			Casters	HP	Amps	Voltage	Net Weight (lbs/kg)	Ship Weight (lbs/kg)
				L	D	H						
BKGF23-HC	1 Swing	23	4	27"(685mm)	31 1/2" (800mm)	81 1/4" (2065mm)	4	1/2	6.3	115V/60Hz	309(140)	340(154)
BKGF49-HC	2 Swing	49	8	54 3/8"(1382mm)	31 1/2" (800mm)	81 1/4" (2065mm)	4	3/4	8.6	115V/60Hz	498(226)	558(253)
BKGF72	3 Swing	72	12	82 "(2079mm)	31 1/2" (800mm)	81 1/4" (2065mm)	6	1	5.5	115V/230V/60Hz	663(301)	768(348)

*BLUE AIR has the right to change specifications without further notice.

Blueair
FOOD SERVICE EQUIPMENT LLC

www.blueairfse.com
info@blueairfse.com
1.886.677.8500

223 W. Rosecrans Ave., CA 90248
T: 310.808.0102 **F**: 310.808.0242

9 W. Shelton Terrace #A, Hillside, NJ 07205
T: 310.808.0102 **F**: 310.808.0242