Dukers®

TOP-MOUNTED REACH-IN REFRIGERATOR

Los Angeles Office 2460 Peck Road, City of Industry, CA 90601 (562) 568-4060 www.dukersusa.com
New Jersey Office 4475 S Clinton Ave South Plainfield, NJ 07080 (215) 808-8239 Info@dukerusa.com

MODEL: D55AR-GS2

Features and Benefits

* Higher Resistance to Dust , high quality condenser

* R290 Natrual Refrigerant, promotes faster cool down and efficient energy consumption

* 3-year parts and labor, 5-year compressor warranty

* Stainless steel inside and outside, sealed interior floors and rounder cabinet corners for easy cleaning

* Self-closing doors with stay open feature.

* Adjustable, heavy duty shelves



Technical Specifications

Voltage/Frequency	115V/60Hz
Refrigerant	R290
Type of Defrost	Automatic
Exterior Finish	Stainless steel
Interior Finish	Stainless steel
Net Weight	463 lbs
Total Capacity	40.74 cu ft
Total Current	8.6A
Climatic Category	4/5
Nema Config.	5-20P

NATURAL REFRIGERANT

Intertek Intertek

MODEL NO	TEMPERATURE RANGE (°F)	EXTERNAL DIMENSION WXDXH(INCHES)	PACKING,CARTON WXDXH(INCHES)	DOOR	40GP CONTAINER CERTIFICATION
D55AR-GS2	33°F ~ 41°F	55⅛" X 32⅝" X 80⅜"	56¾" X 34¼" X 84⅜"	2	21

TOP-MOUNTED
REACH-IN REFRIGERATOR

MODEL: D55AR-GS2

Model:	D55AR-GS2
Rated Voltage:	115V AC
Rated Frequency:	60Hz
Total Input Power:	730W
Total Current:	8.6A
Total Capacity:	40.74 cu ft
Refrigerant:	R290/5.11oz
Climatic Category:	4/5
Protection Type	I
Design pressure	High Side :300PSIG
	Low Side:150PSIG
Insulation Blowing Gas	C-pentane
Net Weight:	463 lbs
NEMA Config	5-20P

STANDARD FEATURES

TOP MOUNT COMPRESSOR
The top mount compressor structure is placed in the coolest possible area, provides quick and easy service
R-Series

HIGH QUALITY STEEL
Interior and exterior high quality steel minimizes dents, scratches and rust

HIGH DENSITY POLYURETHANE INSULATION CFC
free and high density cell foam is Eco-friendly and more energy efficient

STURDY, CLEAN STAINLESS SHELVING
High quality coated stainless shelves may prevent peel and rust.

SELF-CLOSING DOOR SYSTEM
Door Automatically close at 60°

FREEZERS HOLDS 33°F ~ 41°F
FOR BEST IN REFRIGERATORS





NEMA 5-20P

115/60/1

PLAN VIEW

FRONT VIEW

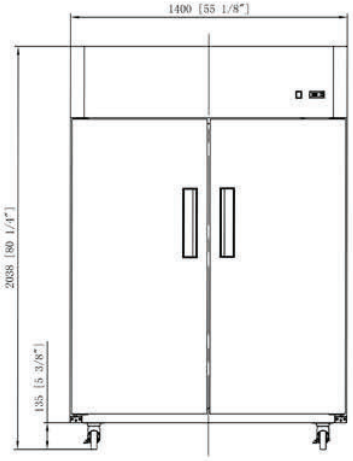

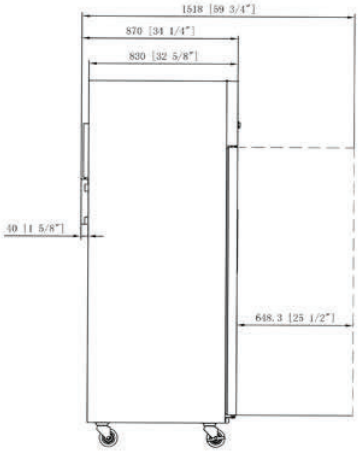

SIDE VIEW

Dukers®
www.dukersusa.com

New Jersey Office
4475 S. Clinton Ave,
South Plainfield, NJ 07080
(215) 808-8239
Info@dukersusa.com

Los Angeles Office
2460 Peck Road,
City of Industry, CA 90601
(562) 568-4060
Info@dukersusa.com