

ATLAS AIR

Commercial Refrigeration Catalog

About Us...

Established in 2007, Atlas Air Commercial Refrigeration has been a pioneering force in the realm of commercial refrigeration, providing top-tier solutions to elevate the standards of commercial kitchens worldwide. With our steadfast commitment to quality, innovation, and reliability, we have carved a niche as a premier provider of refrigeration equipment that exceeds industry standards.

At Atlas Air, we boast state-of-the-art manufacturing plants strategically located across the globe, ensuring efficient production and timely delivery to our valued customers. Our extensive range of products encompasses a spectrum of refrigeration solutions tailored to meet the diverse needs of modern commercial kitchens.

From high-quality reach-in refrigerators and freezers to sleek glass door merchandisers, efficient pizza prep tables, versatile sandwich prep tables, and space-saving undercounter refrigerators and freezers, our comprehensive catalogue offers solutions for every aspect of commercial refrigeration needs. Each product is meticulously crafted to deliver optimal performance, durability, and energy efficiency, empowering businesses to thrive in the competitive foodservice industry.

What sets Atlas Air apart is our unwavering commitment to excellence, reflected in every aspect of our operations. Our team of seasoned professionals combines years of industry expertise with a passion for innovation, continuously pushing the boundaries of what's possible in commercial refrigeration. With cutting-edge technologies and rigorous quality control measures, we ensure that each Atlas Air product delivers unparalleled performance, reliability, and longevity.

Our slogan, *"Elevate Your Cool,"* encapsulates our mission to empower businesses to elevate the quality of their commercial kitchen refrigeration solutions. When you choose Atlas Air, you're not just purchasing equipment; you're investing in reliability, efficiency, and peace of mind for your business.

Driven by a customer-centric approach, we prioritize client satisfaction above all else. Our dedicated support team is always on hand to provide assistance, whether it's guiding you through the selection process, offering technical support, or facilitating seamless after-sales service.

While competitors may strive to match our standards, Atlas Air remains the benchmark for excellence in commercial refrigeration. Our relentless pursuit of innovation, uncompromising quality, and unwavering dedication to customer satisfaction sets us apart as the preferred choice for businesses worldwide.

Join the ranks of satisfied clients who have experienced the Atlas Air difference and elevate your cool today. Experience the pinnacle of commercial refrigeration with Atlas Air.

Table of Contents

Bottom Mount Reach-In Refrigerators 4-5

Bottom Mount Reach-In Freezers 6-7

Glass Display Merchandisers 8-9

Refrigerated Pizza Prep Tables 10-11

Undercounter & Work Top Refrigerators 12-13

Undercounter & Work Top Freezers 14-15

Sandwich Prep Tables 16-17

Mega Top Sandwich Prep Tables 18-19

Note: Specifications subject to change without notice • Do not use in non-commercial or residential settings

Bottom Mount Reach-In Refrigerators



Introducing our premium reach-in refrigerators meticulously engineered to provide exceptional performance and unwavering reliability, perfectly suited to the rigorous demands of your commercial kitchen.

Constructed with a robust stainless steel exterior and a pristine painted aluminum interior, this unit seamlessly merges durability with a polished and hygienic aesthetic. The substantial 2-inch insulation, featuring cyclopentane, ensures superior temperature retention, preserving your refrigerated products in impeccable condition. (2) Locking and (2) non-locking casters are included.




Specifications	Model: A1	A2
Number of Doors	1	2
Number of Shelves	3	6
Capacity (Cu Ft)	21.5	47.30
Exterior Width (Inch)	27	54 1/10
Exterior Depth (Inch)	32	32
Exterior Height (Inch)	83 1/2	83 1/2
Interior Width (Inch)	23	50 1/4
Interior Depth (Inch)	24 3/8	24 3/8
Interior Height (Inch)	60 1/2	60 1/2
Temperatur Range	33°F to 41° F	33°F to 41° F
Horsepower (HP)	1/6	1/5
Voltage (V)	115/60/1	115/60/1
KW per 24h	1.15	1.87
Wattage	327	443
Shipping Weight (lbs)	260	440
Exterior Material	Stainless Steel	Stainless Steel
Interior Material	Painted Aluminum	Painted Aluminum
Interior Floor Material	Stainless Steel	Stainless Steel
Color	Silver	Silver
Door Style	Swing	Swing
Door Type	Solid	Solid
Compressor Location	Bottom Mount	Bottom Mount
Shelf Capacity (lbs)	85	85
Plug Type NEMA	5-15P	5-15P

Features & Benefits

- **Durable:** Stainless steel exterior, aluminum interior
- **Efficient:** Low energy usage
- **Convenient:** Self-closing door, efficient LED lighting
- **Certified:** ETL Electrical, ETL Sanitation, DOE
- **Mobile:** Locking casters
- **Sleek:** Stainless steel finish, swing-style solid door
- **Heavy duty:** Crafted with a sturdy stainless steel exterior, painted aluminum interior, and a reliable 304 stainless steel floor
- **Spacious:** Equipped with three epoxy-coated shelves, each capable of supporting up to 85 pounds
- **Insulated:** Features a substantial 2-inch insulation for optimum temperature retention
- **Powerful:** Driven by a robust compressor
- **Efficient:** Low energy consumption with hydrocarbon-based natural R290 refrigerant




A1

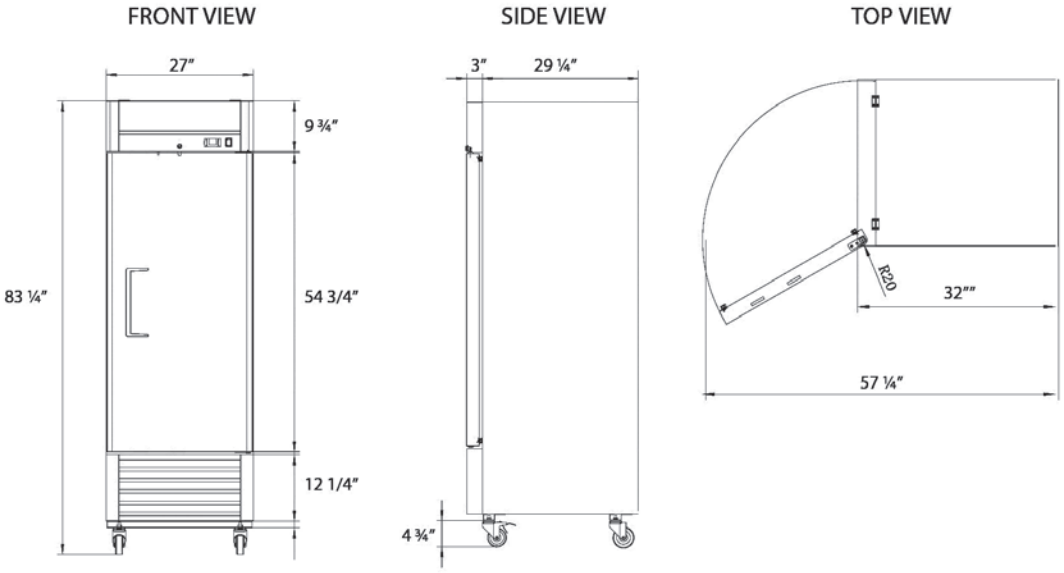



A2

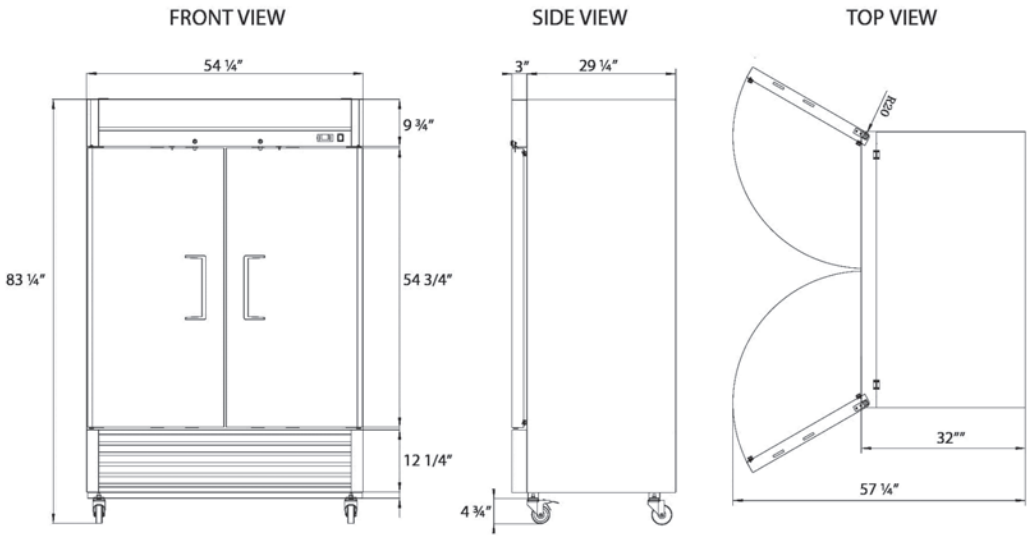

Note: Specifications subject to change without notice • Do not use in non-commercial or residential settings

Bottom Mount Reach-In Freezers



Introducing our premium reach-in freezers meticulously engineered to provide exceptional performance and unwavering reliability, perfectly suited to the rigorous demands of your commercial kitche

Constructed with a robust stainless steel exterior and a pristine painted aluminum interior, this unit seamlessly merges durability with a polished and hygienic aesthetic. The substantial 2-inch insulation, featuring cyclopentane, ensures superior temperature retention, preserving your frozen products in impeccable condition.
(2) Locking and (2) non-locking casters are included.



Specifications	Model: A1F	A2F
Number of Doors	1	2
Number of Shelves	3	6
Capacity (Cu Ft)	21.5	47.30
Exterior Width (Inch)	27	54 1/10
Exterior Depth (Inch)	32	32
Exterior Height (Inch)	83 1/2	83 1/2
Interior Width (Inch)	23	50 1/4
Interior Depth (Inch)	24 3/8	24 3/8
Interior Height (Inch)	60 1/2	60 1/2
Temperatur Range	0°F to -10° F	0°F to -10° F
Horsepower (HP)	1/4	1/2
Voltage (V)	115/60/1	115/60/1
KW per 24h	3.94	8.80
Wattage	479	738
Shipping Weight (lbs)	280	460
Exterior Material	Stainless Steel	Stainless Steel
Interior Material	Painted Aluminum	Painted Aluminum
Interior Floor Material	Stainless Steel	Stainless Steel
Color	Silver	Silver
Door Style	Swing	Swing
Door Type	Solid	Solid
Compressor Location	Bottom Mount	Bottom Mount
Shelf Capacity (lbs)	85	85
Plug Type NEMA	5-15P	5-15P


Features & Benefits

- **Durable:** Stainless steel exterior, aluminum interior
- **Efficient:** Low energy usage
- **Convenient:** Self-closing door, efficient LED lighting
- **Certified:** ETL Electrical, ETL Sanitation, DOE
- **Mobile:** Locking casters
- **Sleek:** Stainless steel finish, swing-style solid door
- **Heavy duty:** Crafted with a sturdy stainless steel exterior, painted aluminum interior, and a reliable 304 stainless steel floor
- **Spacious:** Equipped with three epoxy-coated shelves, each capable of supporting up to 85 pounds
- **Insulated:** Features a substantial 2-inch insulation for optimum temperature retention
- **Powerful:** Driven by a robust compressor
- **Efficient:** Low energy consumption with hydrocarbon-based natural R290 refrigerant




A1F


FRONT VIEW

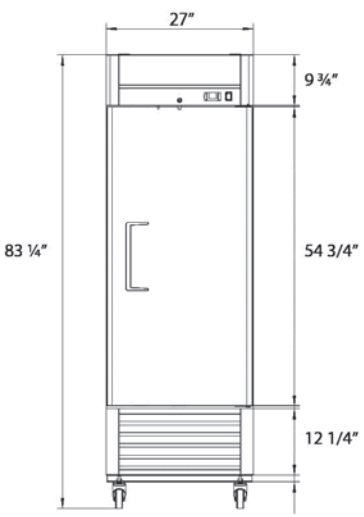

SIDE VIEW

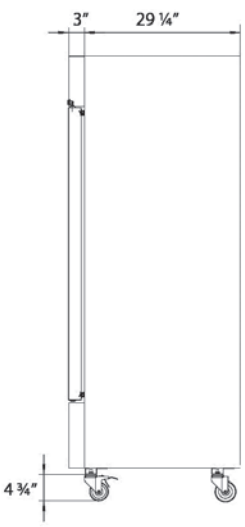


TOP VIEW

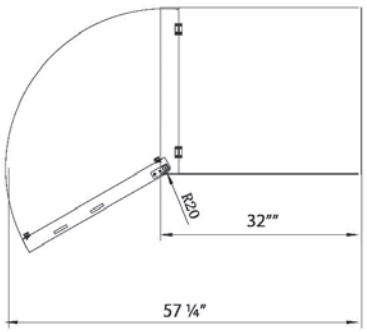




A2F


FRONT VIEW

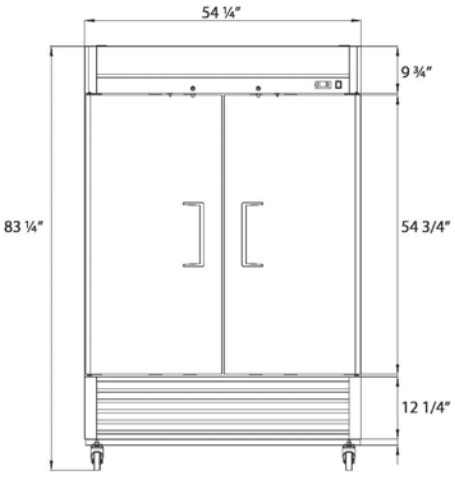

SIDE VIEW

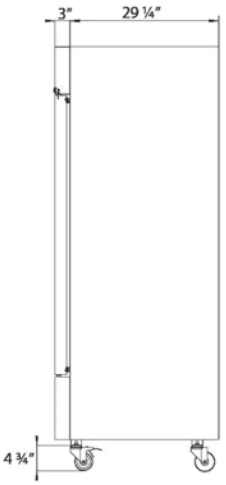

TOP VIEW

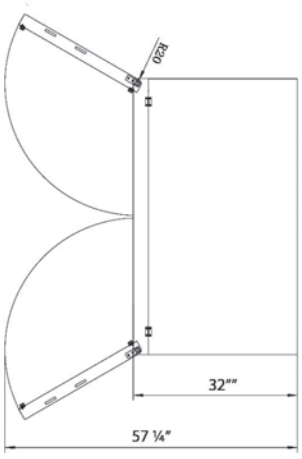

Note: Specifications subject to change without notice • Do not use in non-commercial or residential settings

ATLAS AIR

Glass Display Merchandisers



Introducing our premium, commercial merchandiser glass door refrigerators, meticulously designed to deliver outstanding performance and reliability for your commercial kitchen.

Equipped with four sturdy shelves, each capable of holding up to 85 pounds, you'll have plenty of space to display your merchandise effectively. The built-in LED lighting guarantees clear visibility of your products, attracting customers with its appealing presentation..

Crafted with a robust painted black steel exterior and a clean, easy-to-maintain painted aluminum interior, these units combine durability with a clean and hygienic appearance. The substantial 2- inch insulation, using cyclopentane, ensures excellent temperature control, keeping your products fresh and enticing. Casters are included.


Specifications	Model: A20	A45	A70
Number of Doors	1	2	3
Number of Shelves	3	8	12
Capacity (Cu Ft)	19.2	44.7	70
Exterior Width (inch)	27	54	80 3/4
Exterior Depth (inch)	33 1/2	33 1/2	33 1/2
Exterior Height (inch)	83	83	83
Interior Width (inch)	22 3/8	49 3/8	76 1/8
Interior Depth (Inch)	27 3/4	27 3/4	27 3/4
Interior Height (Inch)	61 1/2	61 1/2	61 1/2
Temperature Range	33°F to 41° F	33°F to 41° F	33°F to 41° F
Horsepower (HP)	1/6	1/5	3/8
Voltage (V)	115	115	115
KW per 24h	1.704	3.374	6.26
Wattage	327	440	664
Shipping Weight (lbs)	240	380	590
Interior Material	White Painted Alum.	White Painted Alum.	White Painted Alum.
Interior Floor Material	Stainless Steel	Stainless Steel	Stainless Steel
Exterior Material	Black Painted Steel	Black Painted Steel	Black Painted Steel
Color	Black	Black	Black
Door Style	Swing	Swing	Swing
Door Type	Glass	Glass	Glass
Compressor Location	Bottom Mounted	Bottom Mounted	Bottom Mounted
Shelf Capacity (lbs)	85	85	85
Plug Type NEMA	5-15P	5-15P	5-15P
Reversible Doors	Yes	Yes	Yes
Features	LED Light	LED Light	LED Light
Temp Controller	Digital	Digital	Digital

Features & Benefits

- **Spacious:** Offers ample space with 4 epoxy-coated shelves, each supporting up to 85 pounds
- **Efficient:** Low energy consumption with hydrocarbon based natural R290 refrigerant
- **Durable:** Stainless steel exterior, painted aluminum interior
- **Convenient:** Self-closing glass door, efficient LED lighting
- **Certified:** ETL Listed, ETL Sanitation, DOE Certified
- **Mobility:** Bottom-mounted, locking casters
- **Powerful:** Driven by a robust compressor
- **Sleek:** Black painted steel, swing-style glass door
- **Heavy duty:** Durable black painted steel, easy-to-maintain white painted aluminum interior and a dependable 304 stainless steel floor
- **Insulated:** Superior 2-inch insulation ensures precise temperature control




A20

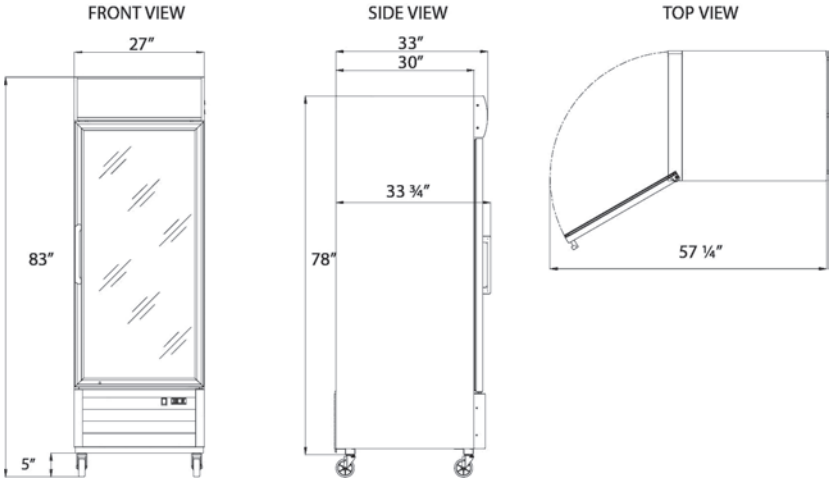




A45

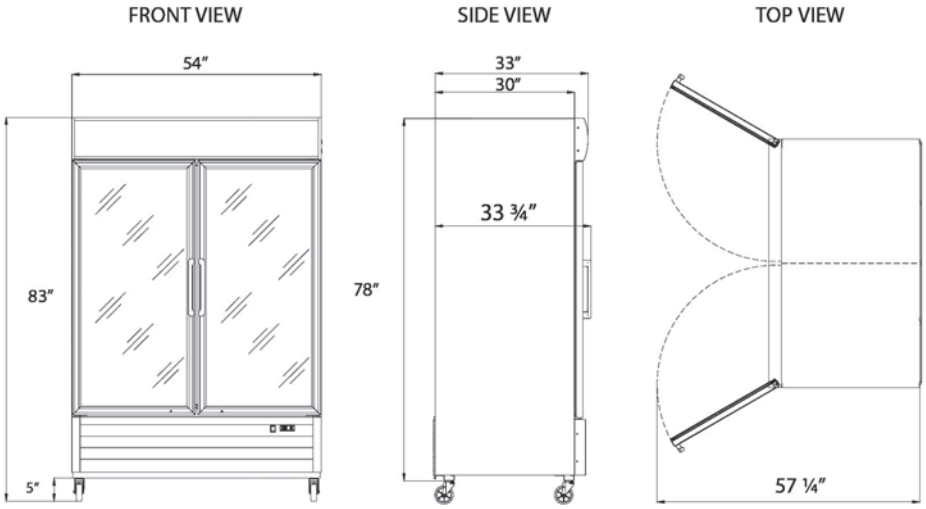



A70

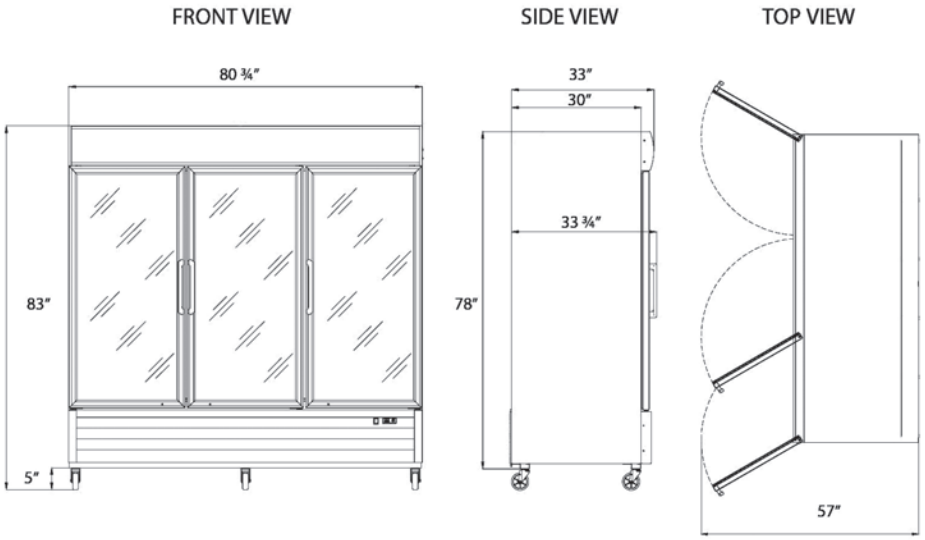

Note: Specifications subject to change without notice • Do not use in non-commercial or residential settings

Refrigerated Pizza Prep Tables



Introducing our commercial pizza prep tables, built to deliver exceptional performance and reliability for your commercial kitchen. These pizza prep tables offer a spacious interior to accommodate all your refrigerated items.

Made with a strong stainless steel exterior and a clean, easy-to-maintain painted aluminum interior, this unit combines durability with a clean and hygienic look. The thick 2-inch insulation, using cyclopentane, ensures excellent temperature control, keeping your products fresh.

Equipped with a sturdy shelves that can hold up to 85 pounds, you'll have plenty of space for your ingredients and items. (2) Locking and (2) non-locking 5.75˝ Casters are included.




Features & Benefits


- **Spacious:** Equipped with epoxy-coated shelves, with the capacity to support up to 85 pounds each
- **Efficient:** Low energy consumption with hydrocarbon based natural R290 refrigerant
- **Durable:** Stainless steel exterior, painted aluminum interior
- **Convenient:** Self-closing door, efficient LED lighting
- **Certified:** ETL Electrical, ETL Sanitation, DOE
- **Mobility:** Locking casters
- **Powerful:** Driven by a robust compressor
- **Sleek:** Stainless steel finish, swing-style solid door
- **Heavy duty:** Robust stainless steel exterior, a pristine painted aluminum interior, and a dependable 304 stainless steel floor
- **Insulated:** Boasts a substantial 2-inch insulation for optimal temperature retention




FRONT VIEW




TOP VIEW

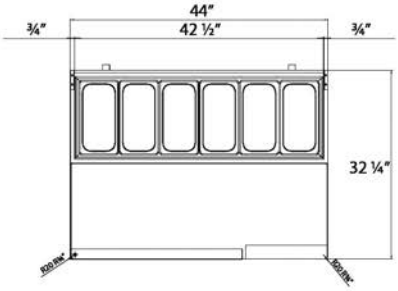

TOP VIEW

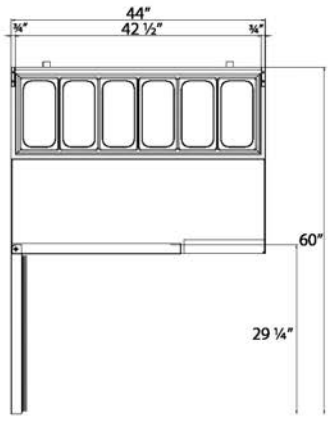


SIDE VIEW

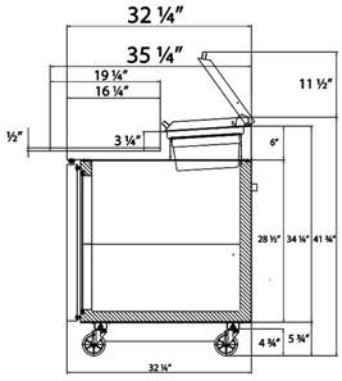


AP44


FRONT VIEW




TOP VIEW

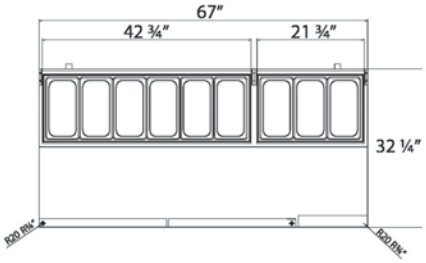

TOP VIEW




SIDE VIEW

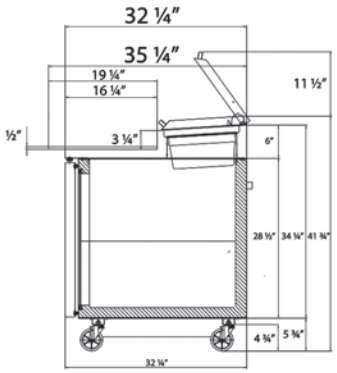


AP67


FRONT VIEW




TOP VIEW

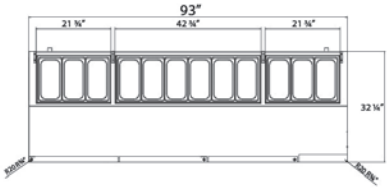

TOP VIEW

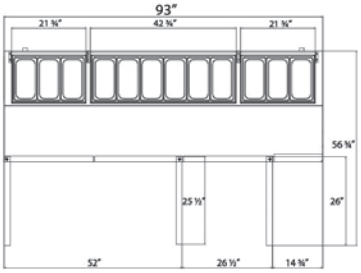

SIDE VIEW



AP93

Specifications	Model: AP44	AP67	AP93
Number of Doors	1	2	3
Number of Shelves	1	2	3
Capacity (Cu Ft)	10.9	20.8	30.8
Exterior Width (inch)	44	67	93
Exterior Depth (inch)	34 3/4	34 3/4	34 3/4
Exterior Height (inch)	42 1/8	42 1/8	42 1/8
Interior Width (inch)	40	63	89
Interior Depth (Inch)	26	26	26
Interior Height (Inch)	26 1/2	26 1/2	26 1/2
Temperature Range	33°F to 41° F	33°F to 41° F	33°F to 41° F
Horsepower (HP)	1/6	1/4	1/2
Voltage (V)	115/60Hz	115/60Hz	115/60Hz
KW per 24h	2.89	4.88	6.51
Wattage	327	479	738
Shipping Weight (lbs)	286	382	502
Interior Material	Painted Aluminum	Painted Aluminum	Painted Alu-minum
Exterior Material	Stainless Steel	Stainless Steel	Stainless Steel
Color	Silver	Silver	Silver
Door Style	Swing	Swing	Swing
Door Type	Solid	Solid	Solid
Compressor Location	Right Side Mounted	Right Side Mounted	Right Side Mounted
Shelf Capacity (lbs)	85	85	85
Plug Type NEMA	5-15P	5-15P	5-15P

Note: Specifications subject to change without notice • Do not use in non-commercial or residential settings



Undercounter & Work Top Refrigerators

Introducing our top-of-the-line commercial undercounter and work top refrigerators, built to deliver exceptional performance and reliability for your commercial kitchen. These undercounter & work top refrigerators offer a spacious interiors, designed to accommodate all your refrigerated items.

Made with a strong stainless steel exterior and a clean, easy-to-maintain painted aluminum inte-rior, these units combine durability with a clean and hygienic look. The thick 2-inch insulation, using cyclopentane, ensures excellent temperature control, keeping your products fresh. (2) Locking and (2) non-locking 5.75˝ Casters are included.




Features & Benefits


- **Spacious:** Equipped with one epoxy-coated shelf, capable of supporting up to 85 pounds
- **Efficient:** Low energy consumption with hydrocarbon based natural R290 refrigerant
- **Durable:** Stainless steel exterior, painted aluminum interior
- **Convenient:** Self-closing doors, efficient LED lighting
- **Certified:** ETL Electrical, ETL Sanitation, DOE
- **Mobility:** Locking casters
- **Powerful:** Driven by a robust compressor
- **Sleek:** Stainless steel finish, swing-style solid doors
- **Heavy duty:** Crafted with a robust stainless steel exterior, a pristine painted aluminum interior, and a dependable 304 stainless steel floor
- **Insulated:** Boasts substantial 2-inch insulation for superior temperature control




AU29

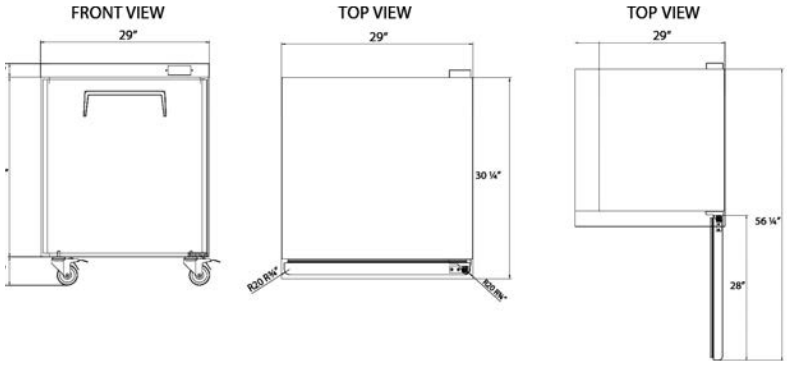


AU48

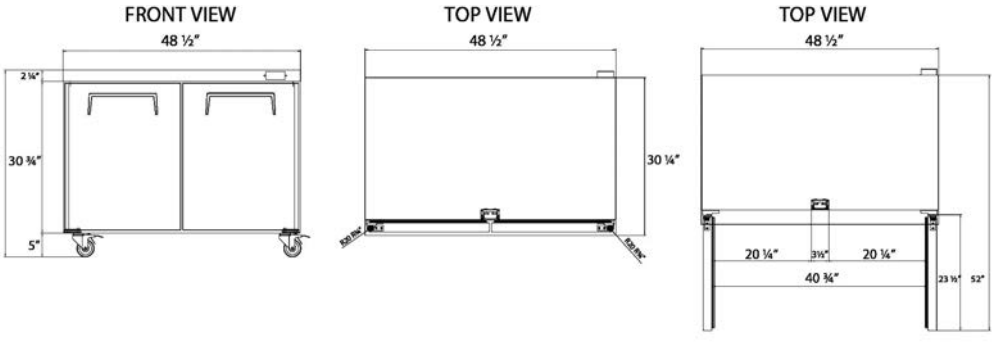

AU60

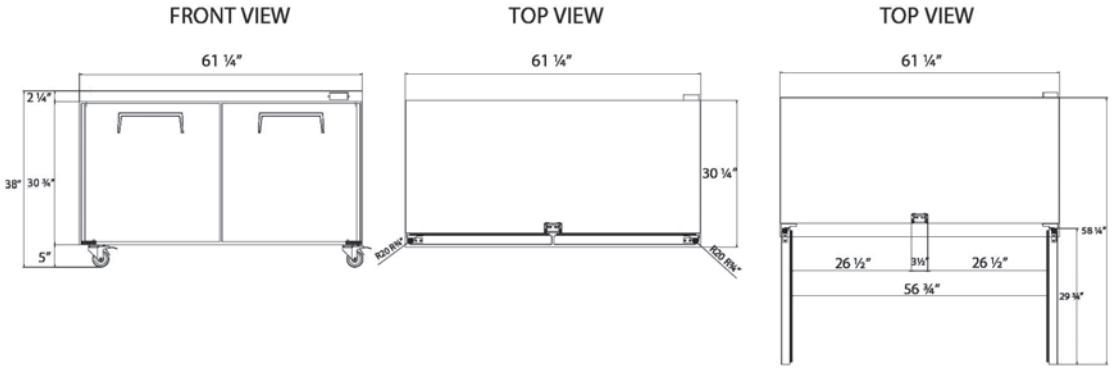

AU72

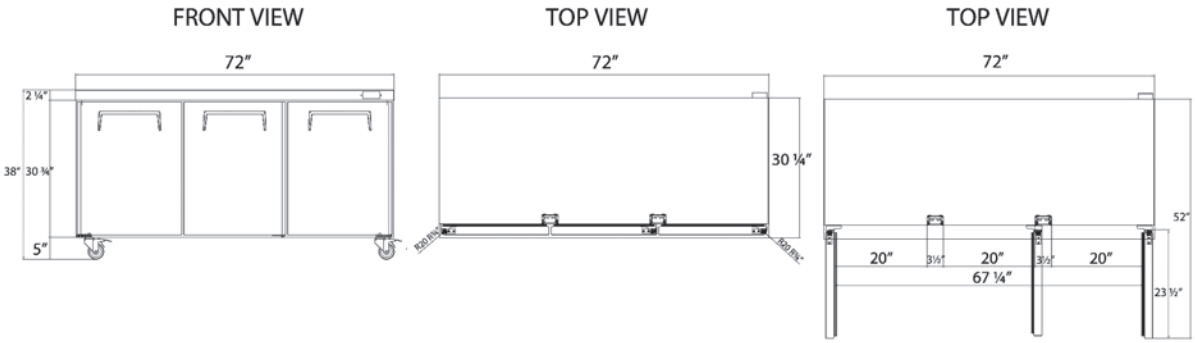

Specifications	Model: AU29	AU48	AU60	AU72
Number of Doors	1	2	2	3
Number of Shelves	1	2	2	3
Capacity (Cu Ft)	6.7	11.1	14.1	16.6
Exterior Width (inch)	29	48 3/8	61 1/4	72
Exterior Depth (inch)	30 3/8	30 3/8	30 3/8	30 3/8
Exterior Height (inch)*	38 3/8	38 3/8	38 3/8	38 3/8
Interior Width (inch)	24 3/4	44 1/4	57	67 3/4
Interior Depth (Inch)	25 3/8	25 3/8	25 3/8	25 3/8
Interior Height (Inch)	26 5/8	26 5/8	26 5/8	26 5/8
Temperature Range	33°F to 41° F	33°F to 41° F	33°F to 41° F	33°F to 41° F
Horsepower (HP)	1/6	1/6	1/6	1/4
Voltage (V)	115/60/1	115/60/1	115/60/1	115/60/1
Wattage	327	327	327	479
Shipping Weight (lbs)	180	245	265	365
Exterior Material	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Interior Walls	Painted Aluminum	Painted Aluminum	Painted Aluminum	Painted Aluminum
Interior Floor	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Color	Silver	Silver	Silver	Silver
Door Style	Swing	Swing	Swing	Swing
Door Type	Solid	Solid	Solid	Solid
Compressor Location	Back Mounted	Back Mounted	Back Mounted	Back Mounted
Shelf Capacity (lbs)	85	85	85	85
Plug Type NEMA	5-15P	5-15P	5-15P	5-15P

*Height includes 5.75" casters. 3" casters available for purchase.

Note: Specifications subject to change without notice • Do not use in non-commercial or residential settings



Undercounter & Work Top Freezers

Introducing our top-of-the-line one-door commercial under-counter & work top freezers, designed to provide outstanding performance and reliability for your commercial kitchen. These undercounter & work top freezers offers a spacious interior perfect for accommodating all your frozen items.

Constructed with a robust stainless steel exterior, a pristine painted aluminum interior, and a reliable 304 stainless steel floor, this unit combines durability with a clean and hygienic appearance. The substantial 2-inch insulation, using cyclopentane, ensures excellent temperature control, preserving the freshness of your products. (2) Locking and (2) non-locking 5.75” Casters are included.




Features & Benefits


- **Spacious:** Equipped with one epoxy-coated shelf, capable of supporting up to 85 pounds
- **Efficient:** Low energy consumption with hydrocarbon based natural R290 refrigerant
- **Durable:** Stainless steel exterior, painted aluminum interior
- **Convenient:** Self-closing doors, efficient LED lighting
- **Certified:** ETL Electrical, ETL Sanitation, DOE
- **Mobility:** Locking casters
- **Powerful:** Driven by a robust compressor
- **Sleek:** Stainless steel finish, swing-style solid doors
- **Heavy duty:** Crafted with a robust stainless steel exterior, a pristine painted aluminum interior, and a dependable 304 stainless steel floor
- **Insulated:** Boasts substantial 2-inch insulation for superior temperature control




AU29

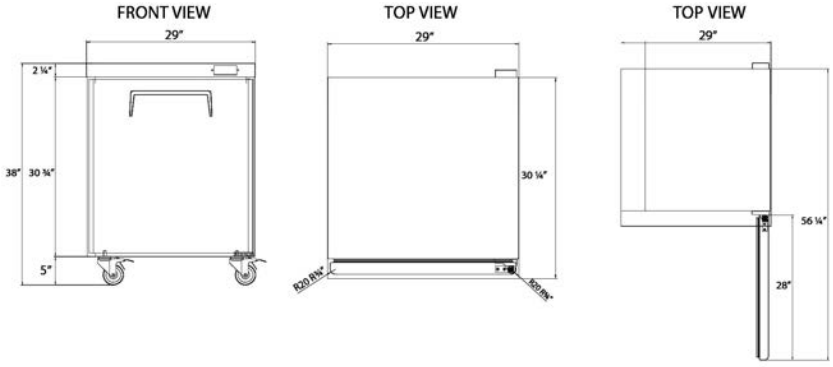


AU48

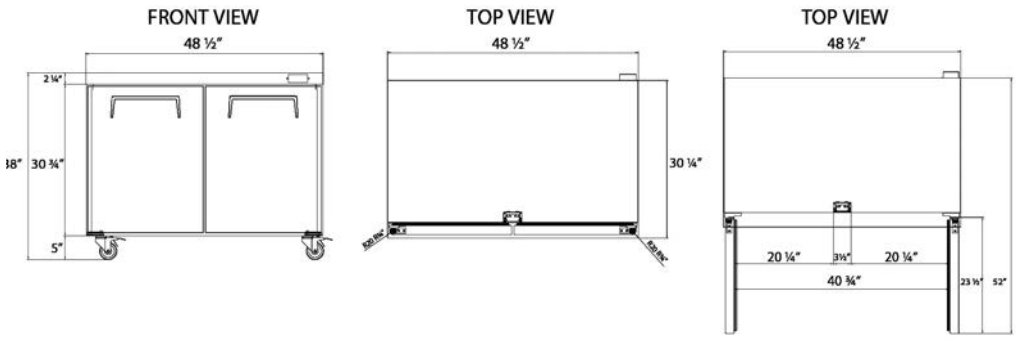

AU60

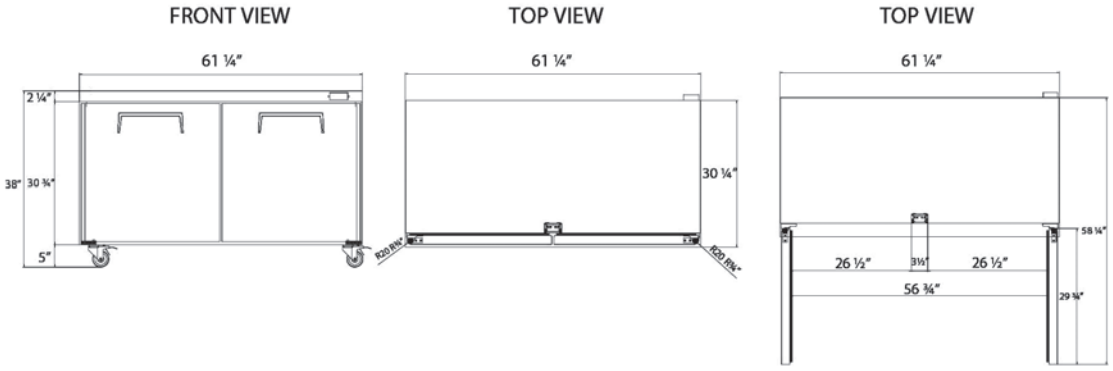

AU72

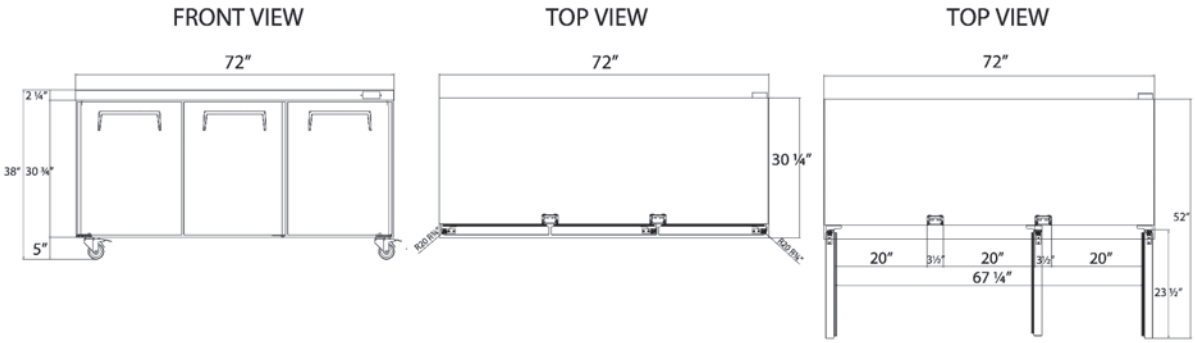

Specifications	Model: AU29	AU48	AU60	AU72
Number of Doors	1	2	2	3
Number of Shelves	1	2	2	3
Capacity (Cu Ft)	6.7	11.1	14.1	16.6
Exterior Width (inch)	29	48 3/8	61 1/4	72
Exterior Depth (inch)	30 3/8	30 3/8	30 3/8	30 3/8
Exterior Height (inch)*	38 3/8	38 3/8	38 3/8	38 3/8
Interior Width (inch)	24 3/4	44 1/4	57	67 3/4
Interior Depth (Inch)	25 3/8	25 3/8	25 3/8	25 3/8
Interior Height (Inch)	26 5/8	26 5/8	26 5/8	26 5/8
Temperature Range	33°F to 41° F	33°F to 41° F	33°F to 41° F	33°F to 41° F
Horsepower (HP)	1/6	1/6	1/6	1/4
Voltage (V)	115/60/1	115/60/1	115/60/1	115/60/1
Wattage	327	327	327	479
Shipping Weight (lbs)	180	245	265	365
Exterior Material	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Interior Walls	Painted Aluminum	Painted Aluminum	Painted Aluminum	Painted Aluminum
Interior Floor	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Color	Silver	Silver	Silver	Silver
Door Style	Swing	Swing	Swing	Swing
Door Type	Solid	Solid	Solid	Solid
Compressor Location	Back Mounted	Back Mounted	Back Mounted	Back Mounted
Shelf Capacity (lbs)	85	85	85	85
Plug Type NEMA	5-15P	5-15P	5-15P	5-15P

*Height includes 5.75" casters. 3" casters available for purchase.

Note: Specifications subject to change without notice • Do not use in non-commercial or residential settings

Sandwich Prep Tables



Introducing our premium sandwich prep tables, these meticulously designed tables deliver outstanding performance and reliability for your commercial kitchen. Its large interior provides ample space for your culinary needs.

Crafted with a robust stainless steel exterior and a clean, easy-to-maintain painted aluminum interior, this prep table combines durability with a hygienic appearance. The interior storage capacity is complemented by its included pans, ideal for sandwich and salad preparation.

The Atlas Air Sandwich Prep Tables feature energy efficient components, with a powerful compressor operating at 115V/60Hz and using eco-friendly R290 refrigerant. They consume minimal energy, ensuring long-term cost savings for your business. (2) Locking and (2) non-locking casters are included.




Features & Benefits


- **Spacious:** Equipped with epoxy-coated shelves, capable of supporting up to 85 pounds each
- **Efficient:** Low energy consumption with hydrocarbon based natural R290 refrigerant
- **Durable:** Stainless steel exterior, painted aluminum interior
- **Convenient:** Self-closing doors, efficient LED lighting
- **Certified:** ETL Electrical, ETL Sanitation, DOE
- **Mobility:** Locking casters
- **Powerful:** Driven by a robust compressor
- **Sleek:** Stainless steel finish, swing-style solid doors
- **Heavy duty:** Crafted with a sturdy stainless steel exterior, a clean painted aluminum interior, and a dependable 304 stainless steel floor
- **Insulated:** Features a substantial 2-inch insulation for superior temperature control




ASP29

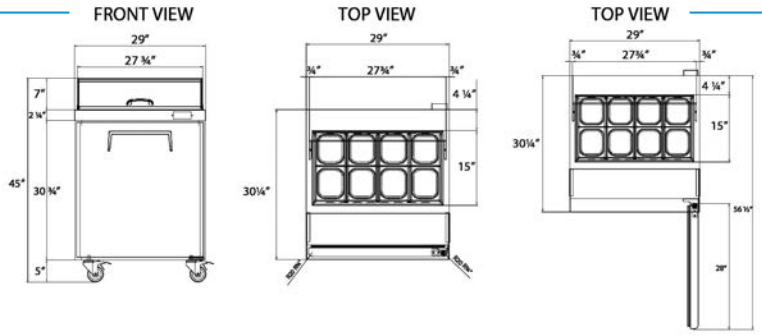


ASP48

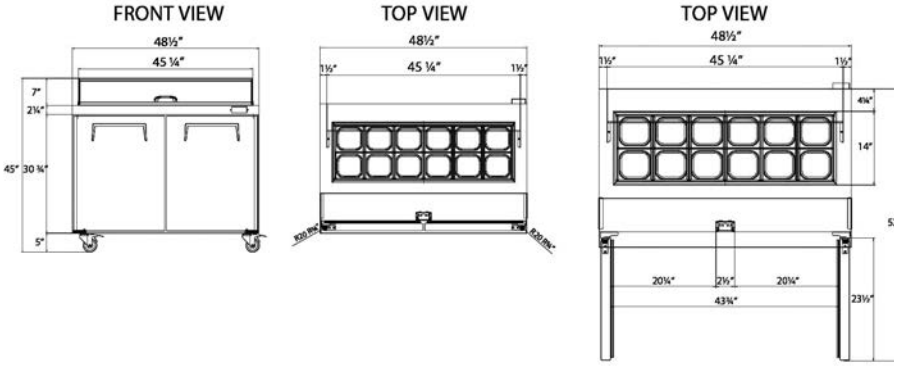

ASP60

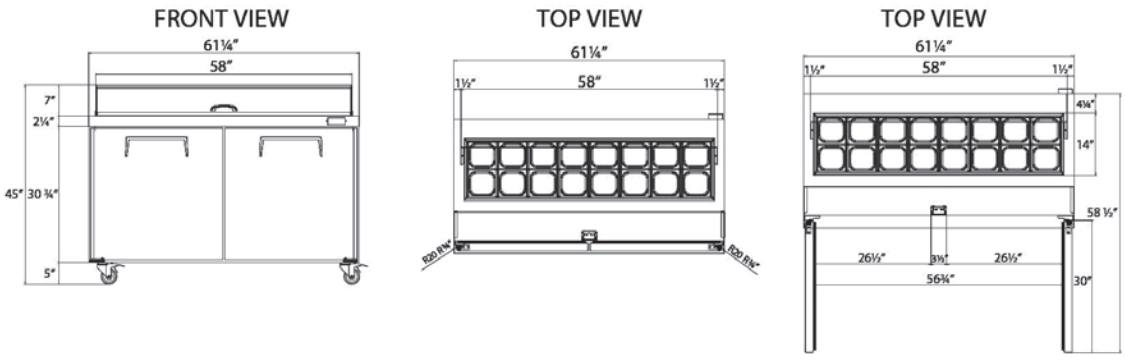

ASP72

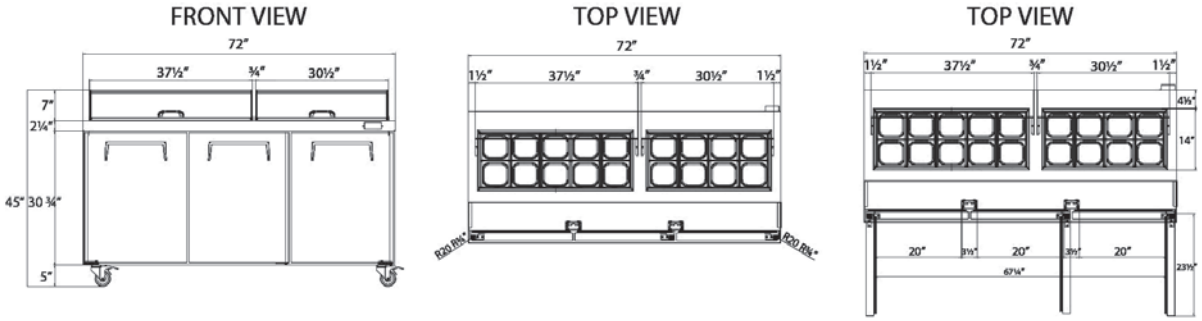

Specifications	Model: ASP29	ASP48	ASP60	ASP72
Number of Doors	1	2	2	3
Number of Shelves	1	2	2	3
Capacity (Cu Ft)	6.7	13.8	17.8	22.3
Exterior Width (inch)	29	48 3/8	61 1/4	72
Exterior Depth (inch)	30 3/8	30 3/8	30 3/8	30 3/8
Exterior Height (inch)	45 3/8	45 3/8	45 3/8	45 3/8
Interior Width (inch)	24 3/4	44 1/4	57	67 3/4
Interior Depth (Inch)	25 3/8	25 3/8	25 3/8	25 3/8
Interior Height (Inch)	28 3/4	28 3/4	28 3/4	28 3/4
Casters	Included	included	included	included
Horsepower (HP)	1/6	1/5	1/5	1/5
Voltage (V)	115/60/1	115/60/1	115/60/1	115/60/1
Wattage	327	443	443	460
Weight (lbs)	80	107	138	170
Shipping Weight (lbs)	195	260	280	380
Exterior Material	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Interior Walls	Painted Aluminum	Painted Aluminum	Painted Aluminum	Painted Aluminum
Interior Floor	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Color	Silver	Silver	Silver	Silver
Door Style	Swing	Swing	Swing	Swing
Door Type	Solid	Solid	Solid	Solid
Compressor Location	Rear Mounted	Rear Mounted	Rear Mounted	Rear Mounted
Shelf Capacity (lbs)	85	85	85	85
Plug Type NEMA	5-15P	5-15P	5-15P	5-15P

Note: Specifications subject to change without notice • Do not use in non-commercial or residential settings

Mega Top Sandwich Prep Tables





Introducing our premium mega top sandwich prep tables, these meticulously designed tables deliver outstanding performance and reliability for your commercial kitchen. Its spacious interior, with an extra row of pans, provides ample space for your culinary needs.

Crafted with a robust stainless steel exterior and a clean, easy-to-maintain painted aluminum interior, this prep table combines durability with a hygienic appearance. The interior storage capacity is complemented by its included pans, ideal for sandwich and salad preparation.

The Atlas Air Sandwich Prep Tables feature energy efficient components, with a powerful compressor operating at 115V/60Hz and using eco-friendly R290 refrigerant. They consume minimal energy, ensuring long-term cost savings for your business. (2) Locking and (2) non-locking casters are included.


Features & Benefits

- **Spacious:** Equipped with epoxy-coated shelves, capable of supporting up to 85 pounds each
- **Efficient:** Low energy consumption with hydrocarbon based natural R290 refrigerant
- **Durable:** Stainless steel exterior, painted aluminum interior
- **Convenient:** Self-closing doors, efficient LED lighting
- **Certified:** ETL Electrical, ETL Sanitation, DOE
- **Mobility:** Locking casters
- **Powerful:** Driven by a robust compressor
- **Sleek:** Stainless steel finish, swing-style solid doors
- **Heavy duty:** Crafted with a sturdy stainless steel exterior, a clean painted aluminum interior, and a dependable 304 stainless steel floor
- **Insulated:** Features a substantial 2-inch insulation for superior temperature control




ASP29M


FRONT VIEW



TOP VIEW




TOP VIEW




ASP48M


FRONT VIEW

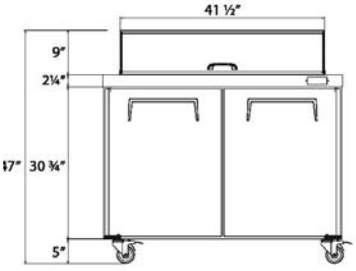


TOP VIEW

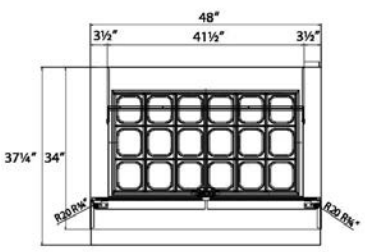


TOP VIEW




FRONT VIEW

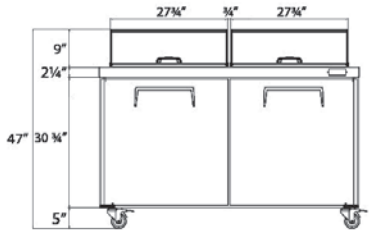

TOP VIEW

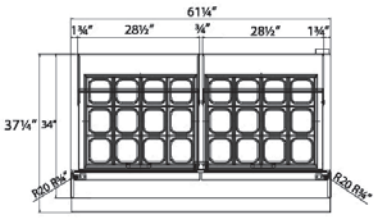


TOP VIEW




ASP60M


FRONT VIEW

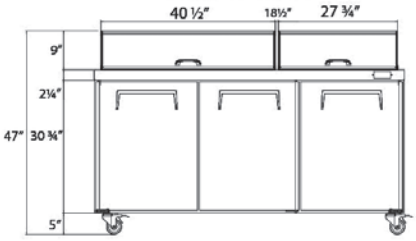

TOP VIEW

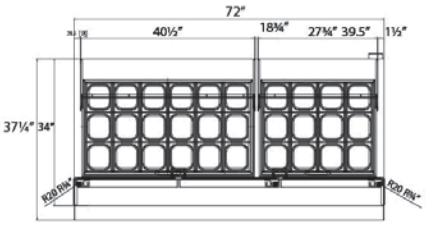

TOP VIEW

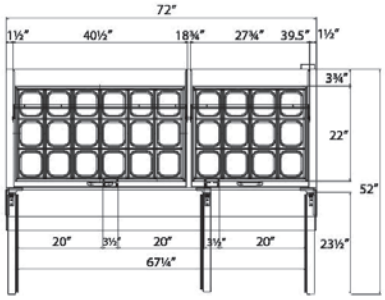

ASP72M

Specifications	Model: ASP29M	ASP48M	ASP60M	ASP72M
Number of Doors	1	2	2	3
Number of Shelves	1	2	2	3
Capacity (Cu Ft)	6.7	13.8	17.8	22.3
Exterior Width (inch)	29	48 3/8	61 1/4	72
Exterior Depth (inch)	37 1/4	37 1/4	37 1/4	37 1/4
Exterior Height (inch)	47 7/8	47 7/8	47 7/8	47 7/8
Interior Width (inch)	24 3/4	44 1/4	57	67 3/4
Interior Depth (Inch)	25 3/8	25 3/8	25 3/8	25 3/8
Interior Height (Inch)	28 3/4	28 3/4	28 3/4	28 3/4
Horsepower (HP)	1/6	1/5	1/5	1/5
Voltage (V)	115/60/1	115/60/1	115/60/1	115/60/1
Wattage	327	443	443	460
Shipping Weight (lbs)	208	273	292	390
Exterior Material	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Interior Walls	Painted Aluminum	Painted Aluminum	Painted Aluminum	Painted Aluminum
Interior Floor	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Color	Silver	Silver	Silver	Silver
Door Style	Swing	Swing	Swing	Swing
Door Type	Solid	Solid	Solid	Solid
Compressor Location	Rear Mounted	Rear Mounted	Rear Mounted	Rear Mounted
Shelf Capacity (lbs)	85	85	85	85
Plug Type NEMA	5-15P	5-15P	5-15P	5-15P

Note: Specifications subject to change without notice • Do not use in non-commercial or residential settings



ATLAS AIR

Commercial Refrigeration

info@atlascoolers.com • atlascoolers.com